

# 3570 Series Electric Mortice Lock



Designed and manufactured in Australia, the 3570 series electric mortice is a high performance lock of superior quality. It is constructed from high grade zinc alloy, with a stainless steel latch bolt and face plate and is suited for all commercial applications.

The lock can be operated by push buttons, intercom systems and key switches; or integrated with electronic access control systems for use with higher security devices such as keypads or card readers.

## Standards and Compliance

**S8**

(Security) Australian Lock Standard (AS4145.2.2008) (when used with equivalent security level keying system)

**D8**

(Durability) Australian Lock Standard (AS4145.2.2008)



Successfully fire rated up to 4hrs on fire door assemblies in accordance with AS1905.1. 2005 (Part 1: Fire resistant door sets)



RCM Certified

SSCEC Endorsed for SL3 Medium Threat Level Areas

## Product Details

<b>Voltage</b>	12VDC - 24VDC Operating Voltage
<b>Current</b>	500mA (max) 80mA holding @ 12VDC 275mA (max) 50mA holding @ 24VDC
<b>LED Current</b>	When LED's are fitted, add 15mA (max) to total current draw
<b>Monitoring</b>	Dual Key override Deadlatched Locked Door closed Request to exit Microswitches: 500mA (max) @ 30VDC each circuit Reedswitch: 100mA (max) @ 30VDC
<b>Environment</b>	Operational temperature range -20c to +60c
<b>Case/Cover</b>	High purity Zinc alloy construction
<b>Backset</b>	60mm standard, 89 & 127 mm available
<b>Latch Bolts</b>	Reversible with Stainless Steel construction
<b>Door Clearance</b>	3 - 6.5 mm
<b>Door Thickness</b>	Standard applications 32 to 50mm
<b>Cylinder</b>	Standard Lockwood oval shaped cylinders
<b>Cabling</b>	1.6 metre length of cable with 12 pin socket supplied with each lock. Recommended cable: 18AWG (0.82mm <sup>2</sup> ) cable runs up to 30m
<b>Furniture</b>	Compatible with Lockwood series door furniture
<b>Standard Finishes</b>	Satin Chrome (SC) standard.

# 3570 Series Electric Mortise Lock

## Key Features

Designed with flexibility in mind, the one lock can cover all functions and is easily configured on site for the required application.


Available in non monitored and monitored versions.

### Monitoring Features:

- Dead latched and Locked
- Door position/Reed switch
- Dual key override monitoring
- Request to exit/REX
- LED indication

### Field Changeable Settings:

- Fail safe/fail secure configuration.
- Multi-voltage - will work on 12-24 VDC systems.
- Handing - left hand and right hand doors
- Selection of free lever or locked lever on both sides of the door
- Key override monitoring either side of the door
- Monitoring contacts – normally closed, normally open (for key override and request to exit only)

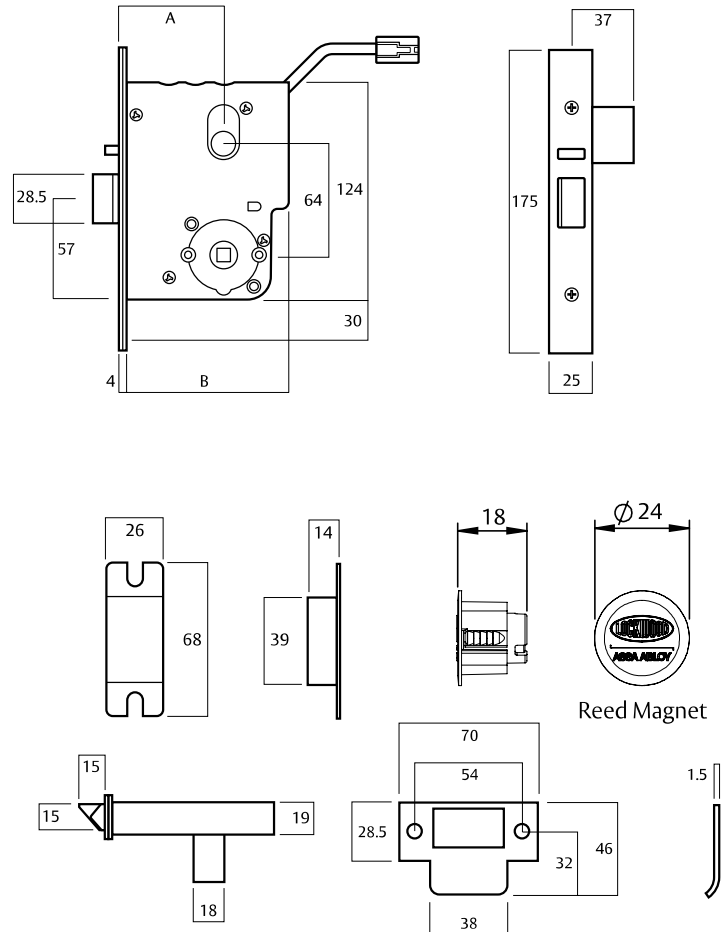

## 3570 Series Electric Mortise Lock

Dimension	Backset		
A	60	89	127
B	100	129	167

## Specification Statement

The lock should be capable of operation on voltages between 12 – 24VDC and have a current consumption not more than 80mA (holding) @12VDC and 50mA (holding) @24VDC. Monitored locks must be capable of monitoring the following functions: Key override, door position / reed switch, selectable hub / Request to exit, & locking bar status. All monitoring outputs must have the ability to be wired independently. All settings – including: fail safe / fail secure, handing, hub selection must be field configurable.

# 3570 Series Electric Mortice Lock

## Ordering Procedure

Sample part number 3572ELAM2RSC is made up of several sections. Choose your product by selecting an option from each section.

Backset	Fixing	Lock Functions	Electric Lock	Safety Function	Sub Function	Handing	Finish
3	5	72	EL	A	M2	R	SC

Backset	Lock Function	Safety Function	Handing
60 mm 3	Primary Lock 70	Fail Safe (Power to lock) A	Right Handed R
89 mm 4	Vestibule Lock 72	Fail Secure (Power to unlock) E	Left Handed L
127 mm 5	Combination Lock 74		


  

Fixing	Electric Lock	Sub Function	Finish
Standard 5	Electric Lock EL	Non-monitored Lock (0 Cylinders) N0	Satin Chrome SC
		Non-monitored Lock (1 Cylinders) N1	
		Non-monitored Lock (1 Cylinder) N1	
		Non-monitored Lock (2 Cylinders) N2	
		Fully monitored Lock including KOM (0 Cylinders) M0	
		Fully monitored Lock including KOM (1 Cylinder) M1	
		Fully monitored Lock including KOM (2 Cylinders) M2	

## Ordering Notes

- 3570 primary locks can be set to achieve all lock functions post purchase, and should be the preferred option when ordering.
- Customised locks are available upon request and incur an additional surcharge and 10 day lead time.
- See over page for primary lock part numbers.

## Handing Chart



<b>Backset</b>	
Nominate backset as required, e.g. 60mm	3
<b>Fixing</b>	
Select the desired fixing method, e.g. Standard Fixing 35	35
<b>Lock Function</b>	
Select function, e.g. Vestibule Lock	3572
<b>Electrical Variant</b>	
Indicate that this is an Electric Lock	3582EL
<b>Safety Function</b>	
Select whether lock should be Fail Secure or Fail Safe, e.g. Fail Safe	3572ELA
<b>Monitoring and Key Override Options</b>	
Select monitoring and cylinders to be supplied, e.g. Monitored Lock with two cylinders	3572ELAM2
<b>Handing</b>	
Determine left or right handing, e.g. Right Handed	3572ELAM2R
<b>Finish</b>	
Specify appropriate finish, e.g. Satin Chrome	3572ELAM2RSC

# 3570 Series Electric Mortice Lock

## Primary Electric Mortice Lock Ordering Procedure

Part Number	Cylinders	Product Description - Non-Monitored
3570ELN0SC	No Cylinder	Electric Mortice Lock 3570 Primary Lock 60 mm Backset Non Monitored
3570ELN1SC	1 Cylinder	Electric Mortice Lock 3570 Primary Lock 60 mm Backset Non Monitored
3570ELN2SC	2 Cylinders	Electric Mortice Lock 3570 Primary Lock 60 mm Backset Non Monitored

4570ELN0SC	No Cylinder	Electric Mortice Lock 4570 Primary Lock 89mm Backset Non Monitored
4570ELN1SC	1 Cylinder	Electric Mortice Lock 4570 Primary Lock 89 mm Backset Non Monitored
4570ELN2SC	2 Cylinders	Electric Mortice Lock 4570 Primary Lock 89 mm Backset Non Monitored

5570ELN0SC	No Cylinder	Electric Mortice Lock 5570 Primary Lock 127 mm Backset Non Monitored
5570ELN1SC	1 Cylinder	Electric Mortice Lock 5570 Primary Lock 127 mm Backset Non Monitored
5570ELN2SC	2 Cylinders	Electric Mortice Lock 5570 Primary Lock 127 mm Backset Non Monitored

Part Number	Cylinders	Product Description - Monitored (hub, deadlatch, solenoid, door position, key override monitoring all as standard)
3570ELM0SC	No Cylinder	Electric Mortice Lock 3570 Primary Lock 60 mm Backset Monitored
3570ELM1SC	1 Cylinder	Electric Mortice Lock 3570 Primary Lock 60 mm Backset Monitored
3570ELM2SC	2 Cylinders	Electric Mortice Lock 3570 Primary Lock 60 mm Backset Monitored

4570ELM0SC	No Cylinder	Electric Mortice Lock 4570 Primary Lock 89 mm Backset Monitored
4570ELM1SC	1 Cylinder	Electric Mortice Lock 4570 Primary Lock 89 mm Backset Monitored
4570ELM2SC	2 Cylinders	Electric Mortice Lock 4570 Primary Lock 89 mm Backset Monitored

5570ELM0SC	No Cylinder	Electric Mortice Lock 5570 Primary Lock 127 mm Backset Monitored
5570ELM1SC	1 Cylinder	Electric Mortice Lock 5570 Primary Lock 127 mm Backset Monitored
5570ELM2SC	2 Cylinders	Electric Mortice Lock 5570 Primary Lock 127 mm Backset Monitored

## Ordering Notes

- Primary locks can be set post purchase to achieve all desired lock settings e.g. fail safe or fail secure, left hand or right hand, combination lock (locked both sides) or vestibule lock (locked outside and free lever inside)
- All locks are multi-voltage 12-24VDC
- 3570 primary locks (std 60mm backset) with no cylinder are stocked items. All other items are made to order, 10 day lead time.

# 3570 Series Electric Mortice Lock

## Accessories - Rebate Kits



Part Numbers	"A"	Finish
3772-RK32CP	32	Chrome Plate
3772-RK46CP	46	
3772-RK32PB	32	Polished Brass
3772-RK46PB	46	
3772-RK32SS	32	Satin Stainless Steel
3772-RK46SS	46	

## Accessories - Long Lipped Strikes

Part Numbers	"A"	Finish
3772-STK43CP	43.5	Chrome Plate
3772-STK47CP	47.5	
3772-STK43PB	43.5	Polished Brass
3772-STK47PB	47.5	
3772-STK43SS	43.5	Satin Stainless Steel
3772-STK47SS	47.5	

## Accessories - Cable Accessories

Part Numbers	Finish
SP572-3129	LED assembly to suit 3570/3580 (suits furniture for monitored locks)
SP3570-1055	Extended 7.5M cable (12 wire) to suit 3570 locks
SP3570-5871	9/12 wire adaptor
LC8810	323mm Power Transfer Cable
LC8811	543mm Power Transfer Cable

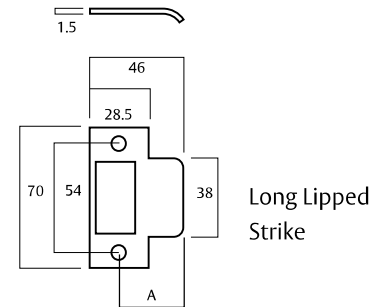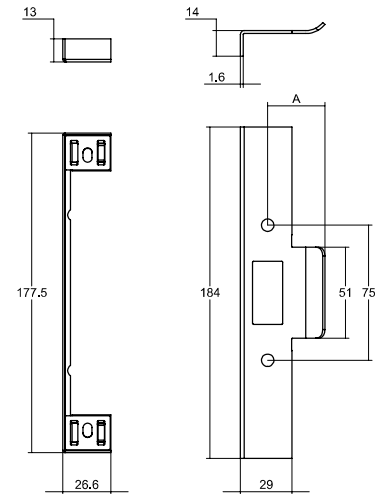


# 3570 Series Electric Mortise Lock

## Electrical Specifications

### Circuit Diagram

**Note:** Diagram depicts fail safe RH opened door, with handle and key in rest state.

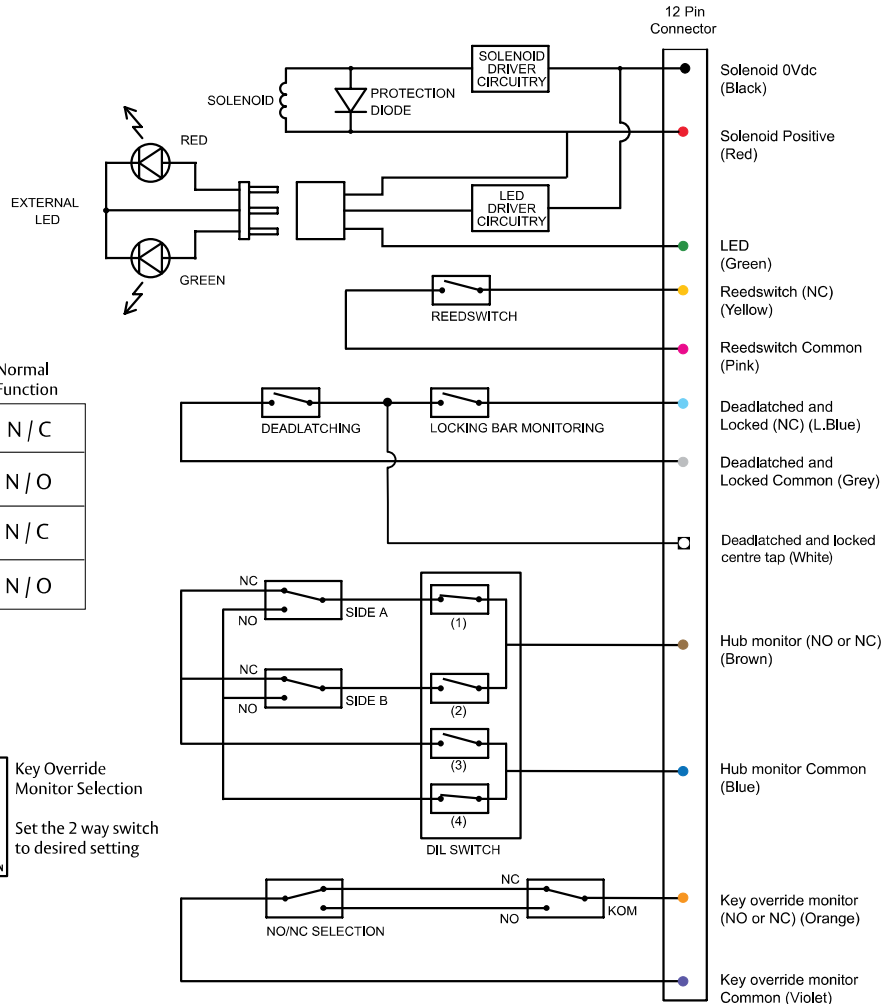


### DIL Switch Settings

#### Hub Monitor

	Switch Number				Lock Side	Normal Function
	1	2	3	4		
ON OFF	<div><div></div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div><div></div></div>	A	N / C			
ON OFF	<div><div></div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div><div></div></div>	A	N / O			
ON OFF	<div><div></div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div><div></div></div>	B	N / C			
ON OFF	<div><div></div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div><div></div></div>	B	N / O			

### Key Override Monitor Selection

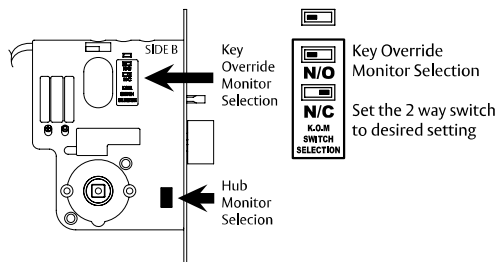

## Solenoid Activation

### Operating Voltage:

12 - 24VDC

### Operating Current:

500mA (max) 80mA holding @ 12VDC

275mA (max) 50mA holding @ 24VDC

For confirmation of the above mentioned operating current, please see installation manual

### LED Current

Where LEDs are fitted, add 20mA (max) to total operating current

### Monitoring Circuits

Microswitches: 500mA (max) @ 30VDC each circuit

Reedswitch: 100mA (max) @ 30VDC

### Colour

Black

Red

Green

Yellow

Pink

Light Blue

Grey

White

Brown

Blue

Orange

Violet

### Function

Solenoid (0VDC)

Solenoid Positive (12VDC - 30VDC)

LED (12VDC - 30VDC)

Door Closed Reedswitch (NC)

Door Closed Reedswitch (Common)

Deadlatched and Locked (NC)

Deadlatched and Locked (Common)

Deadlatched and Locked Centre Tap

Hub Monitor (NO or NC)

Hub Monitor (Common)

Key Override Monitor (NO or NC)

Key Override Monitor (Common)