

# 724 Series Door Closer



A range of adjustable power door closer units suitable for architectural and commercial applications.

Short arm to suit 400mm width door is also available (SP7724-130SIL)

## Specifications

<b>Power</b>	EN adjustable 2 to 4
<b>Back check (BC)</b>	Adjustable
<b>Hold Open</b>	Adjustable. Hold-open can be set at any angle up to 150° of opening.
<b>Handing</b>	Non-handed Suitable for left or right hand doors
<b>Cover</b>	Clip-on
<b>Materials</b>	Extruded aluminium body manufactured from high-performance silicon alloy
<b>Mechanism</b>	Rack and pinion design
<b>Mounting</b>	Regular, parallel and over-door
<b>Valves</b>	Adjustable closing and latching speed valves with overload protection

## Ordering Information

Model	Part Number	Finish
<b>Standard Arm</b>	724SSS	Satin Stainless Steel
	724PSS	Polished Stainless Steel
	724SIL	Silver
<b>Hold-Open</b>	724HSSS	Satin Stainless Steel
	724HPSS	Polished Stainless Steel
	724HSIL	Silver
	724BLK	Black

For formed cover with these finishes add:  
 7724-171 (SSS,PSS) option  
 724SIL + 7724-171SSS = 724SSS

## Standards and Compliance



The Lockwood 724 series closer has been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS1905.1:2005, Part: Fire Resistant Door sets.




Note: Hold open option is not approved on any fire door.

# 724 Series Door Closer

## 724 Standard Arm

Part Numbers	Description
724	Non hold-open
724H	Hold-open




Closer installed on pull side of door. This mounting position permits opening of 180°.



## 724 Parallel Arm

Part Numbers	Description
724	Non hold-open
724H	Hold-open

Closer installed on push side of door. This mounting position permits opening of 180°.

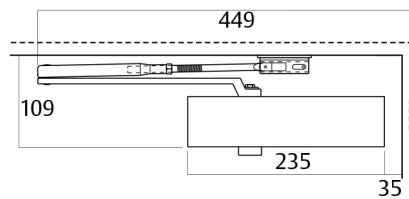

## 724 Over Door Mounting

Part Numbers	Description
724	Non hold-open
724H	Hold-open

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 180°.

