

724 Series Door Closer



A range of adjustable power door closer units suitable for architectural and commercial applications.

Short arm to suit 400mm width door is also available (SP7724-130SIL)

Specifications

| | |
|------------------------|--|
| Power | EN adjustable 2 to 4 |
| Back check (BC) | Adjustable |
| Hold Open | Adjustable. Hold-open can be set at any angle up to 150° of opening. |
| Handing | Non-handed Suitable for left or right hand doors |
| Cover | Clip-on |
| Materials | Extruded aluminium body manufactured from high-performance silicon alloy |
| Mechanism | Rack and pinion design |
| Mounting | Regular, parallel and over-door |
| Valves | Adjustable closing and latching speed valves with overload protection |

Ordering Information

| Model | Part Number | Finish |
|---------------------|-------------|--------------------------|
| Standard Arm | 724SSS | Satin Stainless Steel |
| | 724PSS | Polished Stainless Steel |
| | 724SIL | Silver |
| Hold-Open | 724HSSS | Satin Stainless Steel |
| | 724HPSS | Polished Stainless Steel |
| | 724HSIL | Silver |
| | 724BLK | Black |

For formed cover with these finishes add:
 7724-171 (SSS,PSS) option
 724SIL + 7724-171SSS = 724SSS

Standards and Compliance






The Lockwood 724 series closer has been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS1905.1:2005, Part: Fire Resistant Door sets.

Note: Hold open option is not approved on any fire door.

724 Series Door Closer

724 Standard Arm




| Part Numbers | Description |
|--------------|---------------|
| 724 | Non hold-open |
| 724H | Hold-open |



Closer installed on pull side of door. This mounting position permits opening of 180°.

724 Parallel Arm



| Part Numbers | Description |
|--------------|---------------|
| 724 | Non hold-open |
| 724H | Hold-open |

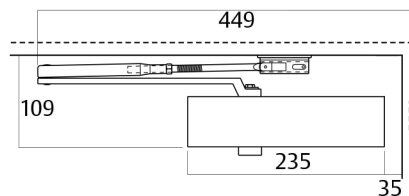

Closer installed on push side of door. This mounting position permits opening of 180°.

724 Over Door Mounting

| Part Numbers | Description |
|--------------|---------------|
| 724 | Non hold-open |
| 724H | Hold-open |

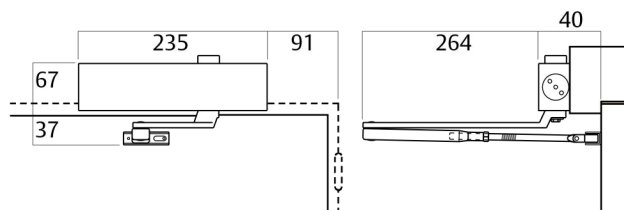

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 180°.