

Exidor Series Exit Device



Description

The Lockwood Exidor series panic hardware offers a modern, aesthetically pleasing style giving optimum safety and security.

Features and Specifications

- Push bar activated panic exit device
- Available in configurations to suit single and double doors
- Fire rated for use on timber and steel doors
- Surface mounted
- Shoot bolts and latch options available
- Suitable for doors up to 1220mm wide and 2440mm high
- Tested to 200,000 cycles
- Non-handed

Product Details

Handing	Field Reversible
Door Width	Maximum 1220mm, bar can be cut to size
Door Mass	Up to 200kg
Projection	98mm from door face
Finish	Silver (SIL) Epoxy powder coating

Standards and Compliance



Successfully tested on fire door assemblies in accordance with Australian Standard AS1905.1-2005. Fire Resistant Doorsets.

Conforms to the standards as set out in CE EN1125 -2015.

Exidor Series Exit Device

Exidor Series Exit Device Single Point


Part Number	Description
EXI296 -SIL	Reversible panic latch

The Exidor 296 is designed for single and double door applications. The unit is operated by a downward thrust of the cross bar to give a speedy exit in panic situations.


An adapter for use with a rim cylinder for outside access is supplied as standard.

Operation

Pushing the bar down into the door face retracts the latch. Releasing the bar returns the latch to the rest position.

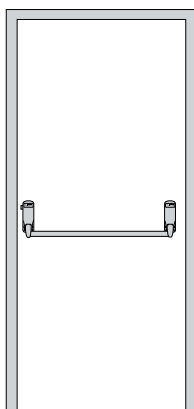

Typical Single Door Installation

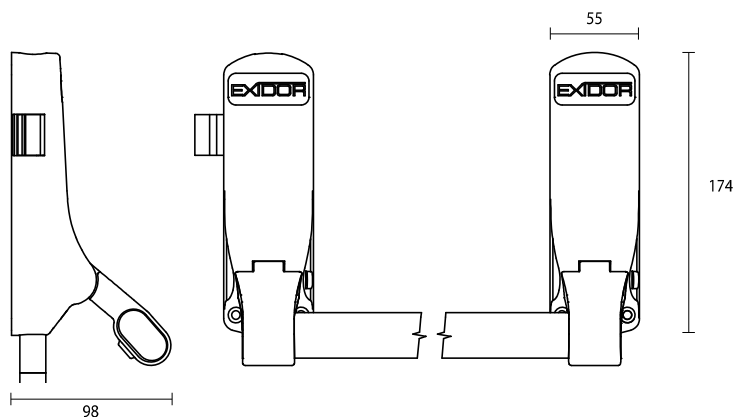

Exidor Accessories


Extended Top Shoot Tube

Part Number	Description
EXIP0804-SIL	Extended Top Shoot Tube for doors up to 3180mm high

For doors exceeding 2440mm in height, the EXIP0804-SIL Extended Top Shoot Tube is designed as an addition to the vertical rod exit device and can be used in applications of up to 3180mm.

To be ordered separately.

Available in SILVER only.

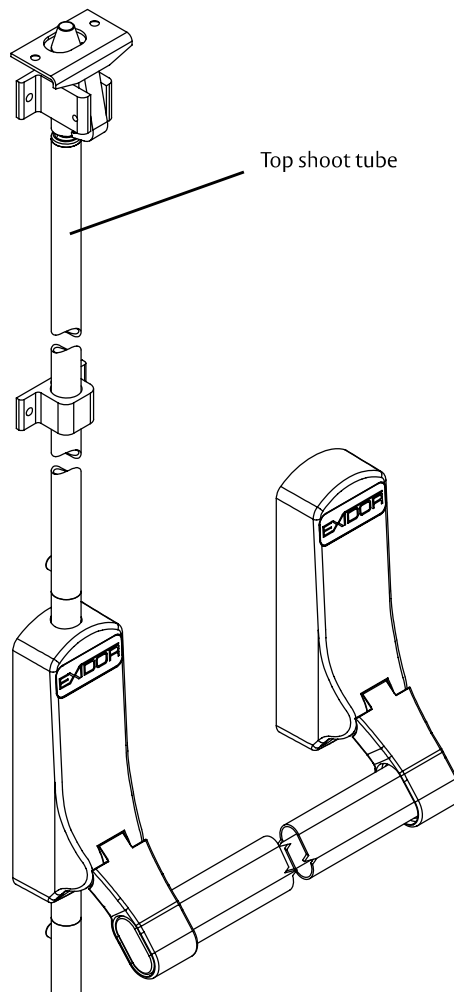

Exidor Accessories

Extended Top Shoot Tube

Part Number	Description
EXI325EA-SIL	Lever OAD Euro w/out lock

The Exidor 325 is an elegant lever operated outside access device. Euro profile cylinder supplied separately to allow flexibility of special keying requirements.

Features and Specification

- Non-handed
- Powder coated for durability
- Fixings to suit steel, timber, aluminium or uPVC doors
- For doors up to 65mm thick

Operation

Pushing the bar down into the door face retracts the bolts. The bolts remain retracted until automatically released on closing of the door.

Euro Profile Half Cylinder is required (not supplied).

To be ordered separately.

Available in SILVER only.

