

Window Balance System



Whitco[®]
SECURING YOUR HOME™

10YEAR MECHANICAL WARRANTY

whitco.com.au

Contents



Spring Sash Balances

page 3



Spiral Sash Balances

page 6

Spring Sash Balances


Application / Description

Narrow, tension spring balance and friction foot system for aluminum double hung windows. Maximum sash weight of 22Kg.

Features and Specifications

- Five weight ranges cater for sash weights of up to 22Kg
- Wide range of lengths suit sashes from 350mm to 1100mm high
- Oil tempered galvanised carbon steel tension spring
- High quality Tension foot with stainless steel bow spring and adjustable polymer friction pads.
- Tough ABS black polymer outer casing
- Wide range of lengths and weights available
- Range of adjustable tension feet to suit various sections
- Shock absorbing stops available
- Australian Made

Available in Trade Pack Only.

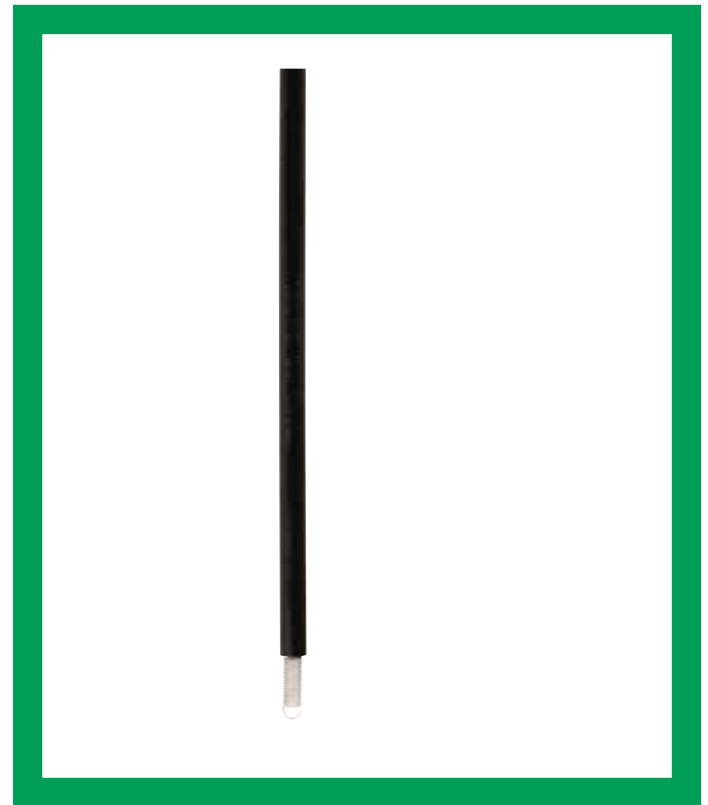

Aluminium



Standard Packs, Finishes and Ratings

Range	End Cap Colour	Sash Weight Rating
51 Range	Green Cap	Up to 6.0 Kg
61 Range	Grey Cap	6.0 Kg to 9.25 Kg
71 Range	Brown Cap	9.25 Kg to 11.0 Kg
81 Range	Red Cap	11.0 Kg to 18.0 Kg
91 Range	Blue Cap	18.0 Kg to 22.0 Kg

Spring Sash Balances are supplied with black coloured tubes.

Non Standard Finishes

Other finishes are not available

Accessories

Standard foot – 2.5 mm pads	W635100
J foot assembly	W635500
Narrow foot assembly	W635200
W foot assembly	W635900
Whitco sash lifts	
Whitco Window Locks	

Front view



Side view



Spring Sash Balances



Accessories

Standard foot assembly 2.5mm

W635100

W foot assembly

W635900



J foot assembly


W635500

SBS 500mm accessory spring steel hook

W492800

SBS 325mm accessory spring steel hook

W493100



Spring Sash Balance

Ordering

Size Chart

Min Sash Height	Max Sash Height	Tube Length	Green End Cap Up to 6.0 Kg	Grey End Cap 6.0 Kg to 9.25 Kg	Brown End Cap 9.25 Kg to 11.0 Kg	Red End Cap 11.0 Kg to 18.0 Kg	Blue End Cap 18.0 Kg to 22.0 Kg
350	400	245	W630251				
400	450	295	W630451	W630461			
450	500	345	W630651	W630661			
500	550	395	W630851	W630861		W630881	
550	600	445	W631051	W631061		W631081	
600	650	495	W631251	W631261	W631271	W631281	
650	700	545	W631451	W631461	W631471	W631481	W631491
700	750	595	W631651	W631661	W631671	W631681	W631691
750	800	645	W631851	W631861	W631871	W631881	W631891
800	850	695	W632051	W632061	W632071	W632081	W632091
850	900	745	W632251	W632261	W632271	W632281	W632291
900	950	795	W632451	W632461	W632471	W632481	W632491
950	1000	845	W632651	W632661	W632671	W632681	W632691
1000	1050	895		W632861	W632871	W632881	W632891
1050	1100	945		W633061	W633071	W633081	W633091
1100	1150	995		W633261	W633271	W633281	W633291

Spiral Sash Balances

Application / Description

Narrow, fully sealed variable pitch spiral and torsion spring balance and foot system for timber or aluminum double hung windows.

Features and Specifications

- Fully sealed construction
- Oil tempered carbon steel torsion spring
- Zinc plated variable pitch spiral
- Metal zinc diecast fixing plug
- Tough ABS polymer outer casing available in Black
- Corrosion resistant stainless steel sash foot plate
- Comprehensive range of tube lengths and balance weight
- Adjustable spring tension to suit application
- Shock absorbing stops available
- Range of feet available
- Individual balances in trade packs available
- Tension key required for adjustable foot version
- Australian Made



Aluminium Timber



Double Hung

Standard Packs / Finishes

Foot options - available with either:

- **Standard foot**
Attached to spiral rod, includes accessory kit.
- **Ready to accept adjustable foot**
Foot sold separately and accessory pack sold separately.

Finishes


Available in black tube colour.

Non Standard Finishes

Other finishes are not available.

Keying

It is recommended that spiral balances are supported in a 15mm x 15mm rebate.

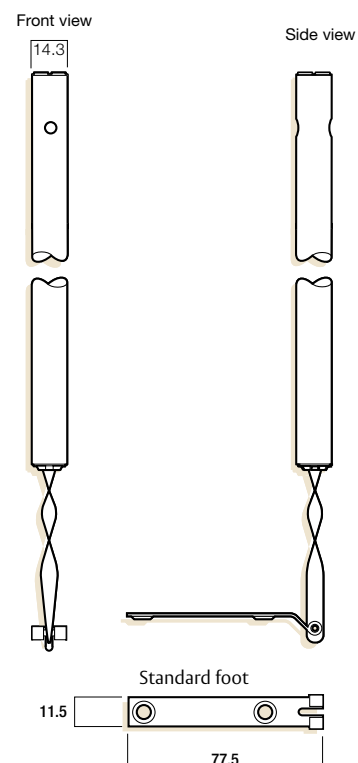

Accessories – Strikes, Outer Pulls, Packers & Cylinders

Performance


Weight Recommended sash weights

Weight Range	Rating
Weight range 1	2.25 to 7.25 Kg
Weight range 2	7.25 to 10 Kg
Weight range 3	10 to 14 Kg

Accessories


Standard adjustable foot for Weight Range 1-3 (2.25 to 14 kg):

W615100




TFD foot:

W615200




Spiral long stop – polymer

W493000



Spiral short stop – polymer. Order as part of kit

W492900



Tension key spring wire

W492700



Spiral accessory kit: includes top and bottom stop and fixing screws
Black

W492900

Spiral Sash Balances

Spiral Balance Selection Guide

Step A - Whitco Product Model

Whitco Spiral Balance product model is W61

Step B - Select Balance Number

If replacing an existing balance, measure the body length and match to Body Length 'L' Dimension.

Step B1 - Top Sash Balances

1. Measure the overall height of the top sash (including horns, if used). This is the Closed 'C' Dimension.
2. Refer to appropriate Closed 'C' dimensions on size chart and select the Balance Number matching the Closed 'C' Dimension.
3. If there is not an exact match to Closed 'C' Dimension go to the next smaller Balance Number
e.g. – For Closed 'C' dimension of 341mm select balance number 110.

Step B2 - Bottom Sash Balances

1. Measure the overall window opening height from sill to head. This is the Extended Dimension 'E'
2. Refer to appropriate Extended Dimensions 'E' on size chart and select the Balance Number matching the Extended 'E' Dimension.
3. If there is not an exact match to Extended 'E' Dimension go to the next larger Balance Number size.
e.g. – For Extended 'E' dimension of 546mm select balance number 110.

Step C - Select Weight Range

The next step is to establish the weight of each sash. It is best to weight the sash to ensure an accurate sash weight. If an estimated sash weight is required, this can be calculated using the glass weight per square meter of glass shown below, together with the sash area. For double glazed glass, double the glass thickness used for the calculation. An allowance may also need to be made for the weight of the sash frame material.

- 3 mm glass thickness weights – 7.5 Kg Per square metre
- 4 mm glass thickness weights – 10.0 Kg Per square metre
- 5 mm glass thickness weights – 12.5 Kg Per square metre
- 6 mm glass thickness weights – 15.0 Kg Per square metre
- Double glazed 6mm+6mm glass thickness weights – 30.0 Kg Per square metre


Select the correct weight range to match the sash weight, by using the weight ranges shown below.
e.g. – For a sash weight of 5.25kg select weight range 1

Step D - Select Foot Option

Foot options: Standard foot attached 1 or no foot (to accept adjustable foot) 0
e.g. – For Standard foot attached select foot option 1.

Step E - Tube Colour

Tube finish is Black only – 17

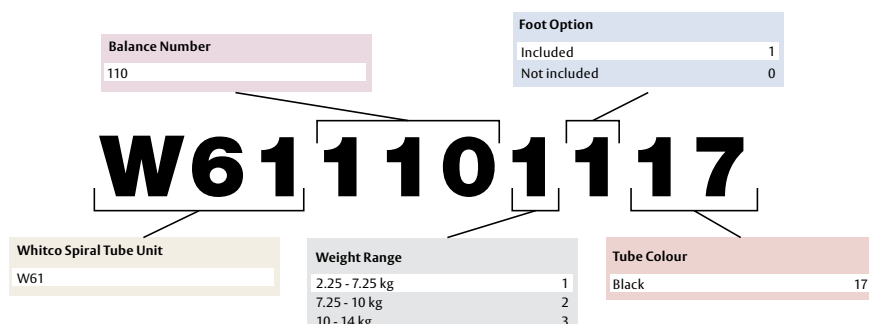

Spiral Sash Balances


Size Chart

This size chart and the spiral balance selection guide on the previous page have been colour coordinated for added convenience.

Balance Number	Step B1	Step B2	'L' Body Length	Step C		
	'C' Closed Dimension (For top balance use exact balance or go smaller)	'E' Extended Dimension (For bottom balance use exact balance or go larger)		Weight Range 1 2.25-7.25 Kg	Weight Range 2 7.25-10 Kg	Weight Range 3 10-14 Kg
110	318	559	292	3		
200	343	610	318	3		
220	368	660	343	3		
240	394	711	368	3		
260	419	762	394	3		
280	445	813	419	3		
210	470	864	445	3		
300	495	914	470	3		
320	521	965	495	4		
340	546	1,016	521	4		
360	572	1,067	546	4		
380	597	1,118	572	4		
310	622	1,168	597	4		
400	648	1,219	622	4	5	6
420	673	1,270	648	4	5	6
440	699	1,321	673	4	5	6
460	724	1,372	699	5	5	6
480	749	1,422	724	5	5	6
410	775	1,473	749	5	5	6
500	800	1,524	775	5	5	6
520	826	1,575	800		5	6
540	851	1,626	826		6	6
560	876	1,676	851		6	7
580	902	1,727	876		6	7
510	927	1,778	902		6	7
600	953	1,829	927		6	7
620	978	1,880	953		6	7
640	1,003	1,930	978		7	7
660	1,029	1,981	1,003		7	8
680	1,054	2,031	1,029		7	8
610	1,080	2,083	1,054		7	8
700	1,105	2,134	1,080		7	8
720	1,130	2,183	1,105		7	8
				Initial number of pre-tension turns to use during installation		

5

Pre-tension turns number
Numbers shown in the main table are the initial number of pre-tension turns to use during installation for that balance

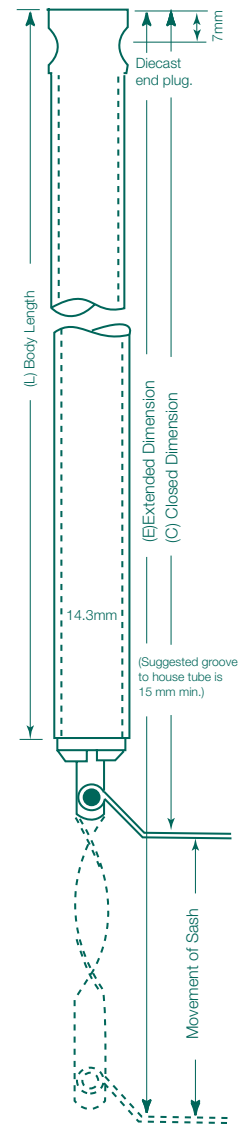

Whitco[®]

Whitco protects millions of Australian homes and offers the largest range of security and hardware products for residential doors and windows in Australia. With our proud heritage, and by offering a wide variety of locks at affordable prices, Whitco has become one of Australia's most trusted brands.

The Whitco brand is an integral part of ASSA ABLOY Australia Pty Limited, the market leader in the lock and security products industry in Australia.

ASSA ABLOY

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.

As the world's leading lock group, ASSA ABLOY offers a more complete product range of door opening solutions than any other company in the market.

Australia
1300 LOCK UP (1300 562 587)
whitco.com.au

New Zealand
Telephone +64 94157111
assaabloy.co.nz

ASSA ABLOY Australia Pty Ltd
235 Huntingdale Road
Oakleigh, Victoria, 3166
Australia

info.au@assaabloy.com
assaabloy.com.au

ASSA ABLOY New Zealand Ltd
6 Armstrong Road
Albany, North Shore City, 0632
New Zealand

info.nz@assaabloy.com
assaabloy.co.nz

An ASSA ABLOY Group brand

Disclaimer
Whilst every effort has been made to ensure that the information contained in this brochure is accurate at the time of publication, ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") recommends that you consult ASSA ABLOY or its agents prior to placing an order to ascertain current information on specific products, as ASSA ABLOY reserves the right to make any changes without notice. ASSA ABLOY will not be liable for any injury, loss or damage whatsoever, arising from any errors or omissions in the information contained in the brochure or arising from the use or application of the information contained herein.