

### **Application**

Suitable for interior cavity door applications in residential and commercial environments.

Hangers come standard with a steel bracket and four nylon tyred wheels with precision bearings.

# **Panel Specification**

Track System: Cavity Run 60 For Individual Panels: Max Panel Weight 60kg 2400mm Max Panel Height Min Panel Thickness 19mm

#### Standard Sets and Packs

Sets comprise of top track, hangers, guide, spanner and timber screws.

Set No. Panel width Track Length CR60-20/1 610mm to 915mm 2000mm CR60-30/1 3000mm 915mm to 1525mm

Pack No.

Fitting pack only, no track

## **Hardware Specification**

Track:

Aluminium, Mill Material

Standard lengths 2000mm, 3000mm, 4000mm and 6000mm

Hangers (2 per panel):

Hanger has a nylon body and comes standard with zinc plated steel bracket and four nylon tyred wheels with chrome precision bearings.

Nylon guide for cavity panel applications.

Pressed steel zinc plated. 805-SPN to suit 608 Hanger


Accessories:

60SCT Soft Close


Suitable for panels up to 60kg.

Cavity Buffer C153B

Rubber buffer and fixing screw.

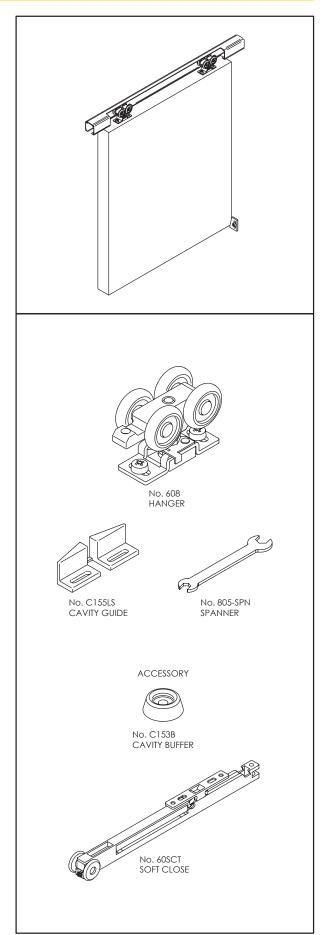





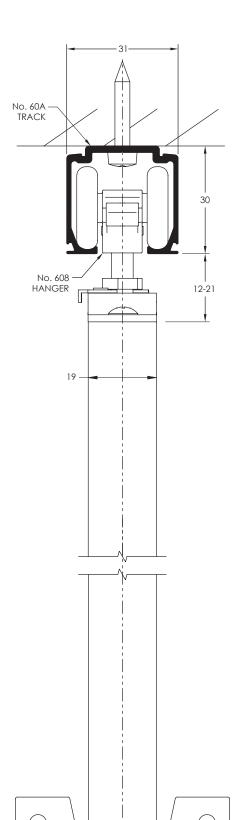


CLEARANCE

### INSTALLATION INSTRUCTIONS







Prepare Hardware
Screw hanger bolts into hangers.
Insert hangers into track.



Attach Hardware to Panel
Hanger mounting plates should be
positioned centrally to panel thickness
Plates should be facing the same direction.
Opening facing cavity opening.




Fix Track Parallel to Floor
Position 8g screws first 50mm in from
each end and every 300mm between.




4 Fit Panel

With the latch on the mounting plates open, bring panel up to hangers and push hanger bolt into plate. Close latches when bolts are in the plates.



**5** Adjust Panel


Screw bolt in or out of hanger to adjust panel height. Adjust height so panel is square.




6 Fit Guide

Locate at opening jamb. With door hanging plumb fix guides to either side of door.





**7** Fit Soft Closes Soft close - install as per INST60SCT.



No. C155LS CAVITY GUIDE