

Application

Suitable for interior cavity door applications in residential and commercial environments.

Hangers come standard with a steel bracket and four nylon tyred wheels with precision bearings.

Panel Specification

| Track System: | Cavity Run 60 |
|------------------------|---------------|
| For Individual Panels: | |
| Max Panel Weight | 60kg |
| Max Panel Height | 2400mm |
| Min Panel Thickness | 19mm |

Standard Sets and Packs

Sets comprise of top track, hangers, guide, spanner and timber screws.

| Set No. | Panel width | Track Length |
|-----------|-----------------|--------------|
| CR60-20/1 | 610mm to 915mm | 2000mm |
| CR60-30/1 | 915mm to 1525mm | 3000mm |

| Pack No. | |
|----------|-----------------------------|
| CR60-1PK | Fitting pack only, no track |

Hardware Specification

| | |
|------------------|-----------------------------------|
| Track: | 60A |
| Material | Aluminium, Mill |
| Standard lengths | 2000mm, 3000mm, 4000mm and 6000mm |



| | |
|-------------------------------|-----|
| Hangers (2 per panel): | 608 |
|-------------------------------|-----|


Hanger has a nylon body and comes standard with zinc plated steel bracket and four nylon tyred wheels with chrome precision bearings.

| | |
|--|--------|
| Guide: | C155LS |
| Nylon guide for cavity panel applications. | |

| | |
|----------------------------|----------------------------|
| Spanner: | 805-SPN to suit 608 Hanger |
| Pressed steel zinc plated. | |

| | |
|---------------------------------|-------|
| Accessories: | C153B |
| Cavity Buffer | |
| Rubber buffer and fixing screw. | |

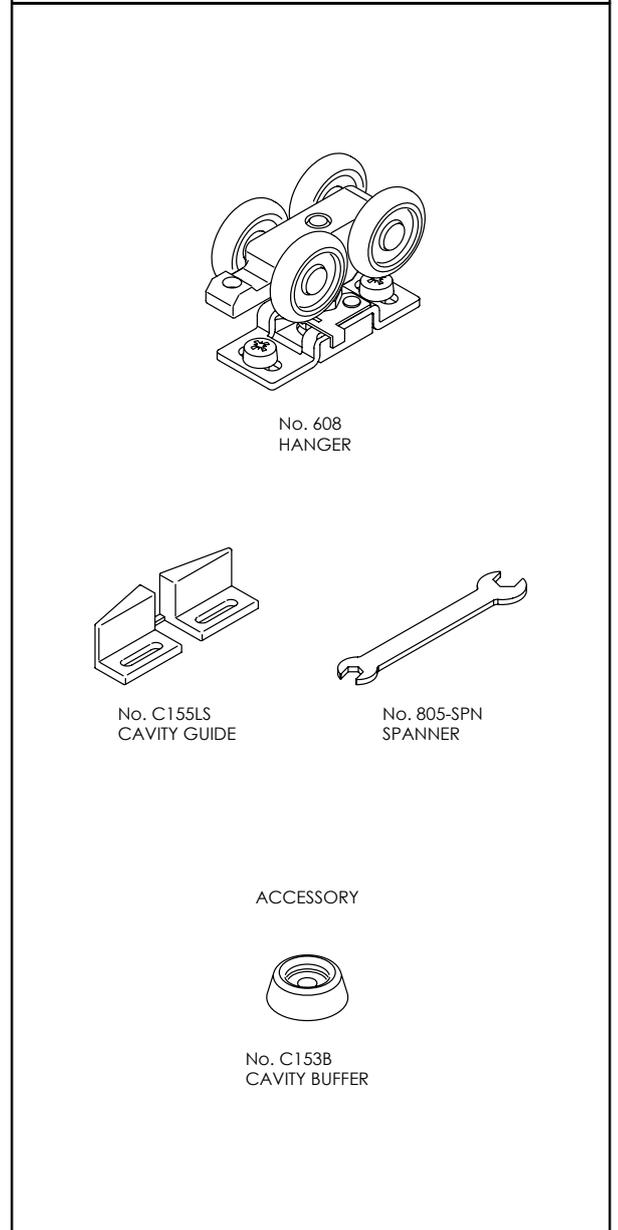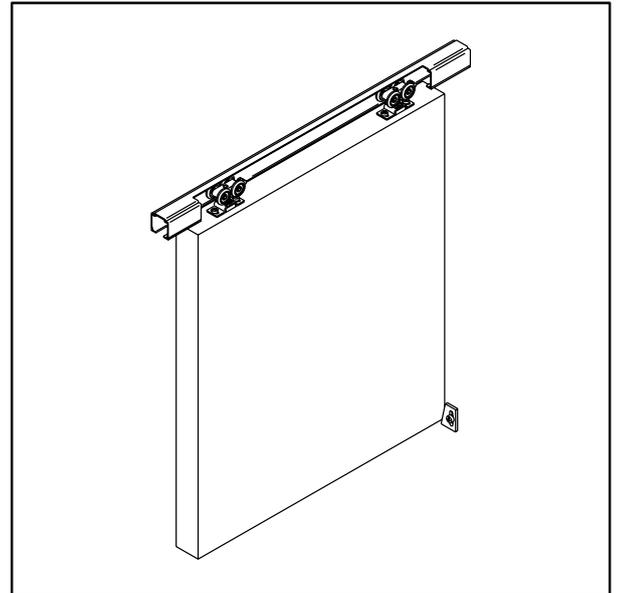


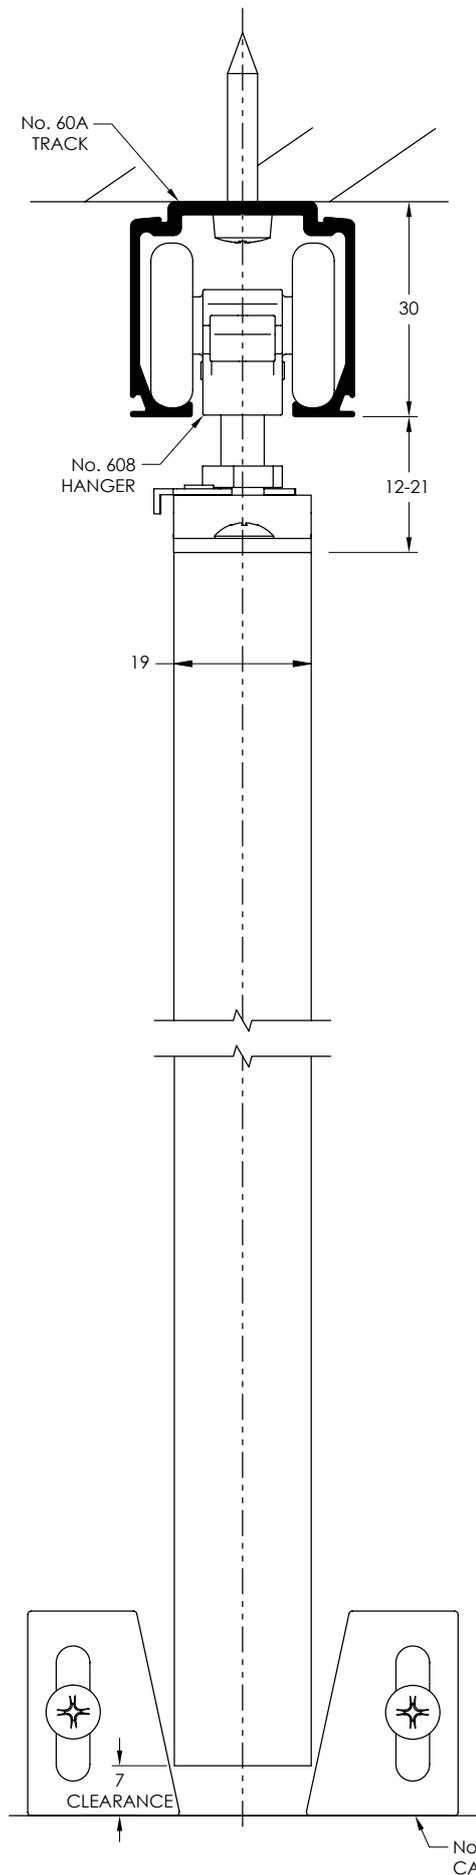

INSTALLATION INSTRUCTIONS


1 Prepare Hardware

Screw hanger bolts into hangers. Insert hangers into track.

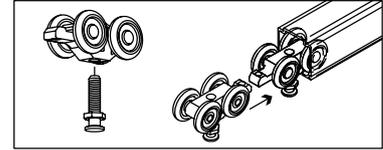


2 Attach Hardware to Panel

Hanger mounting plates should be positioned centrally to panel thickness. Plates should be facing the same direction. Opening facing cavity opening.

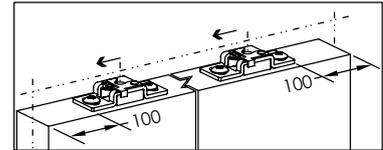


3 Fix Track Parallel to Floor

Position 8g screws first 50mm in from each end and every 300mm between.

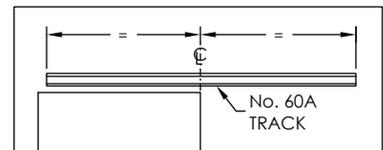


4 Fit Panel

With the latch on the mounting plates open, bring panel up to hangers and push hanger bolt into plate. Close latches when bolts are in the plates.

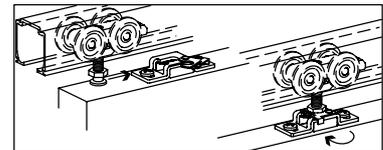

5 Adjust Panel

Screw bolt in or out of hanger to adjust panel height. Adjust height so panel is square.

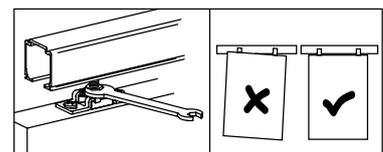

6 Fit Guide

Locate at opening jamb. With door hanging plumb fix guides to either side of door.

