

SPECIFICATION

The KES2200 Series is a high security electric strike, offering a single model including switch monitoring of latch, strike and solenoid, variable voltage from 12VDC/AC to 28VDC/AC, a fast and convenient interchangeable fail safe/fail secure function (changeable on site).

The construction of housing and keeper are of stainless steel and include pre-drilled holes for optional extension lips.

Also included in package is an installation kit for metal frame installation.



Dimensions

175L x 44W x 27D (mm)




Features

- Fail safe/fail secure interchangeable
- Variable voltage 12~24VDC
- Suits latch depth up to 15mm
- Monitored latch, strike and solenoid
- Pre-drilled for optional extension lips
- Includes mounting tabs for metal frame
- Solid stainless steel construction

Specification


- Operating voltage variable 12~24VDC
- Voltage tolerance +/- 15%
- Current draw: 12VDC/190mA, 24VDC/130mA (at temperature 20°C)
- Latch/Keeper Micro Switch Rating: 1A/125VAC
- Operating temperature: -10°C~45°C
- Humidity: 0-95%
- Cycle tested to 1 million cycles
- 2 hour fire rating
- CE Certified
- C-Tick

Dimensions: (mm)

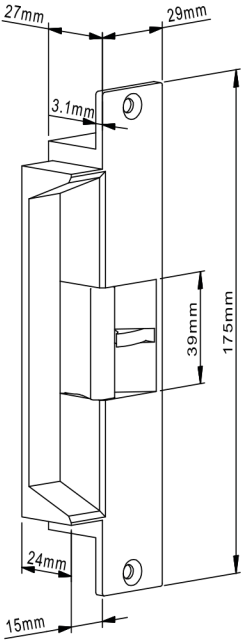


Optional Accessories

Lip extension brackets for wide jamb.

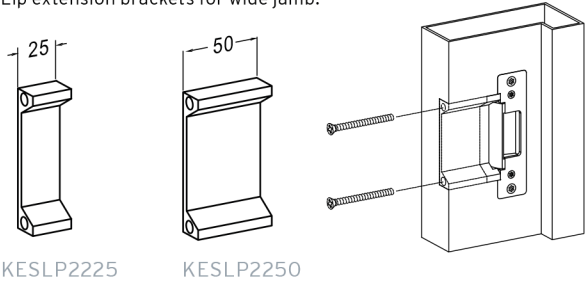

Version Changeable

The KES2200 Series Electric Strike can easily be changed between fail safe and fail secure modes.

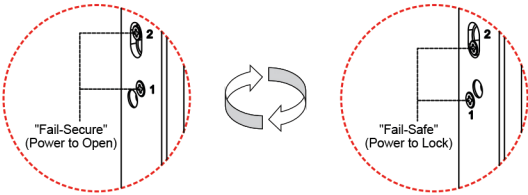

PRODUCT CODE	DESCRIPTION
KES2200	Electric Strike, Heavy duty 12~28VDC/AC, Monitored
ACCESSORIES	
KESLP2225	Lip Extension 25mm, suit KES2200 Electric Strike
KESLP2250	Lip Extension 50mm, suit KES2200 Electric Strike