


# Technical Data Sheet

## S203 Stainless Steel Lift Off Hinge 100x82x3.0mm – Non-Handed

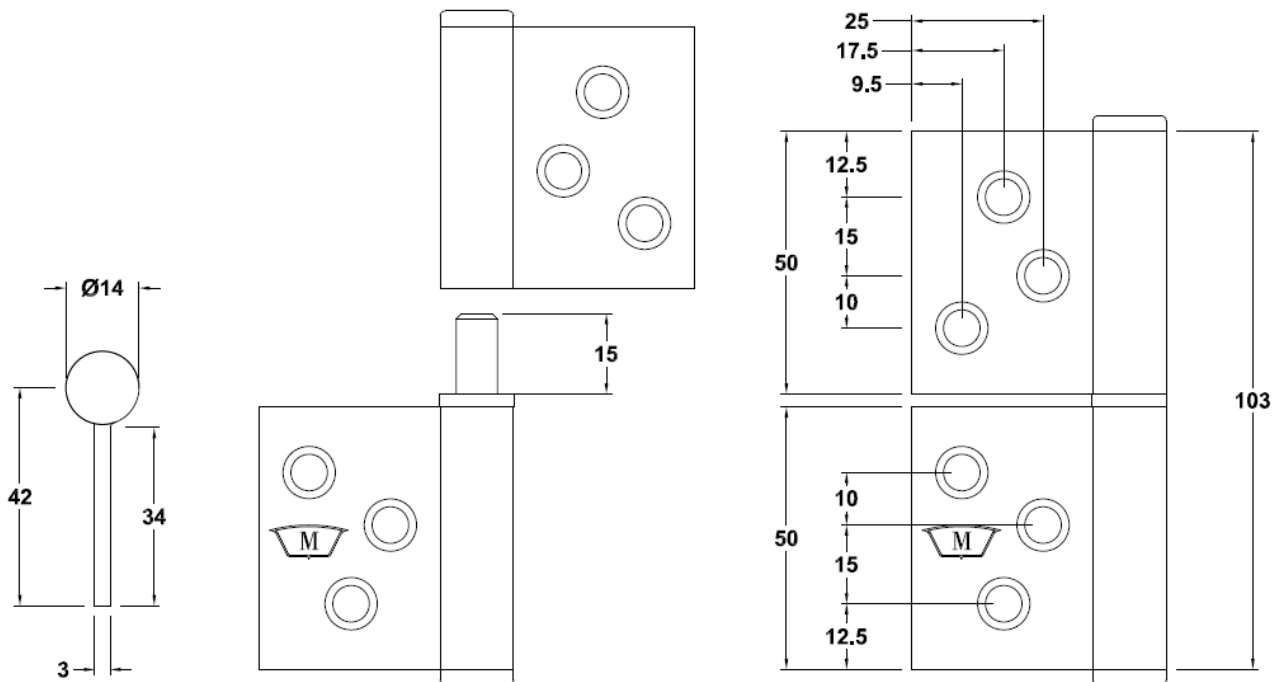

### SPECIFICATION

- **Hinge Type:** Lift Off Butt – Non-Handed
- **Material:** Stainless Steel 304 grade
- **Hinge Pin:** 6.9mm Diameter Stainless Steel 304 grade
- **Bearing:** Bearing Washer Stainless Steel 304 grade
- **Knuckle:** Round
- **Endcaps:** Stainless Steel 304 grade Pressed Interference fit
- **Maximum Weight Capacity:** 25kg's – 3 Hinges

### FINISH

- S203SSS – Satin Stainless Steel

### INSTALLATION GUIDE

- Minimum Door Thickness 35mm
- Suitable for Timber & Aluminium doors & frames
- As a guide doors:
  - 2040 high x 820 x 25kg's – 3 hinges
- Recommended that the minimum of 3 hinges be used with the top hinge located as high as possible

### FIXING

- Fastening screws supplied
- Metal fixings - 10G x 12mm, 304SS undercut countersunk self-tapping Phillips drive screw
- Timber fixings – 10G x 32mm 304SS Type AB self-tapping Phillips drive screw