


## STAINLESS STEEL BUTT HINGE

Code No. S239--100mm

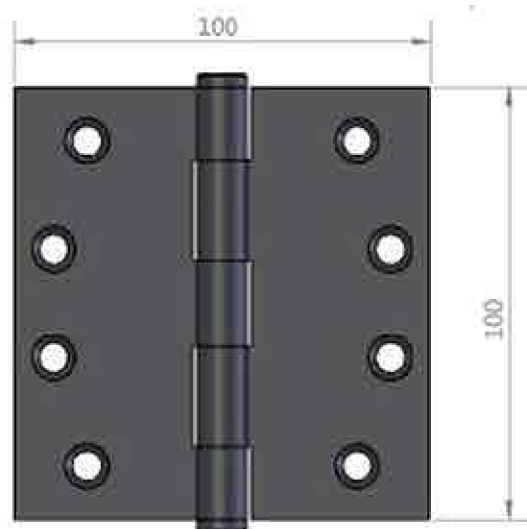

### APPLICATION

Suitable for aluminium & timber doors with aluminium, steel and timber frames.

### SPECIFICATION

**Material:** Stainless Steel 304 Grade.  
**Pin:** 6.9mm - 304 grade stainless steel.  
**Knuckle:** Round  
**Endcaps:** Pressed-in interference fit. Stainless Steel 304 Grade.  
 Stamped with McCallum crest.  
 Fixed Pin.

### INSTALLATION GUIDE ONLY

- **Door thickness:** Minimum 35mm
- When using a door closer, we recommend a minimum of 4 hinges be used, with the top hinge located as high as possible.
- Standard Door: 2040 (H) x 820 (W) - 3 hinges.



### FIXING


- 32mm x 10# stainless steel fasteners for timber (supplied).
- 12mm x M5 stainless steel metal fasteners (supplied).
- Pop rivets are not recommended.
- Not recommended for Bi-Fold door systems.

### FINISH

- Black.

### OLD CODE NO.

- SB100100SFP (2.5mm)

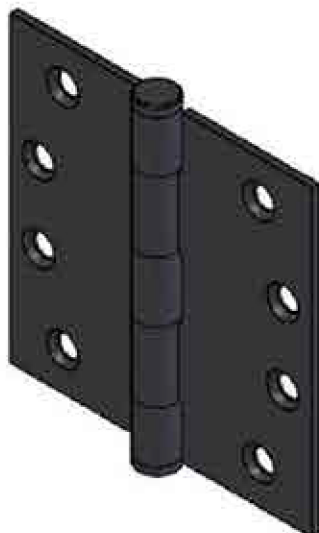

Code No. S239