

# Threshold Plates



## RP112



A medium duty threshold plate which can be positioned back-to-back to form a two-way threshold ramp conforming to NCC D3D16 (b).

Can be used in conjunction with Raven door bottom seals to prevent rain, draughts, noise and smoke infiltration.

Can also be used to provide a ramped frame for internal door mats and tiles.

**Location:** Door sill.

**Finish:**\* Satin clear (silver) or bronze anodised aluminium (25µm).

**Fixing:** Screw fix. Colour matched zinc plated, cross recess head CSK S.T. screws supplied.

**Sizes:** Available in stock lengths.

### Approvals

UL R37913

ANSI/BHMA A156.21

**Access & Mobility AUS/NZ:** NCC D3D16 & D4D4. AS1428.1:2009 Part 10.5. AS1428.1:2021 Part 7.5. NZBC D1/AS1 1.3.2.

**UK/EU:** Approved Document M.

**Fire AUS/NZ:** NCC S12C2. AS1530.4 & AS 1905.1. NZBC C/AS2 4.16.2(a) & App C6.1.1.

**UK/EU:** Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

Up to FRL / FRR-/240/30 & FD240.



BAL BAL FZ when used with a BAL rated door bottom seal in accordance with AS 3959.

### Certification

Global GreenTag<sup>CertTM</sup>

Product Health Declaration<sup>TM</sup> (GreenTag PHD<sup>TM</sup>)

PlatinumHEALTH<sup>TM</sup> HealthRATE<sup>TM</sup>

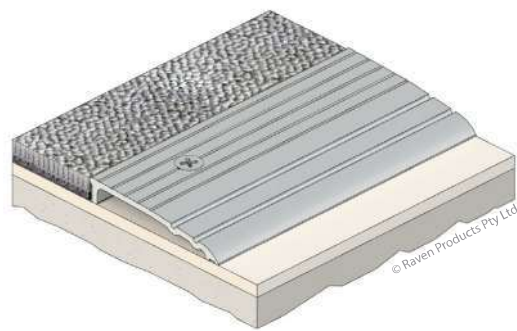

\*Note: Not all finishes are available in all sizes.

## RP115



A low profile threshold plate that can be used in conjunction with Raven door bottom seals to prevent rain, draughts, noise and smoke infiltration. Suitable for use with most floor pivots.

**Location:** Door sill.

**Finish:**\* Satin clear (silver) or black anodised aluminium (25µm).

**Fixing:** Screw fix or builders adhesive for concealed fixing (user determined). Colour matched zinc plated, cross recess head CSK S.T. screws supplied.

**Sizes:** Available in stock lengths.

### Approvals

ANSI/BHMA A156.21

**Access & Mobility AUS/NZ:** NCC D3D16 & D4D4. AS1428.1:2009 Part 7.2. AS1428.1:2021 Part 4.2. NZBC D1/AS1 1.3.2.

**UK/EU:** Approved Document M.

**Fire AUS/NZ:** NCC S12C2. AS1530.4 & AS 1905.1. NZBC C/AS2 4.16.2(a) & App C6.1.1.

**UK/EU:** Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

Up to FRL / FRR-/240/30 & FD180.

BAL BAL FZ when used with a BAL rated door bottom seal in accordance with AS 3959.

### Certification

Global GreenTag<sup>CertTM</sup>

Product Health Declaration<sup>TM</sup> (GreenTag PHD<sup>TM</sup>)

PlatinumHEALTH<sup>TM</sup> HealthRATE<sup>TM</sup>

