

Door Bottom Sweep Seals



RP129Si



A heavy duty medium temperature smoke and weather door bottom seal. The RP129Si can be checked out or drilled to accommodate pivot hardware whilst still providing a continuous seal.

Use in conjunction with RP130Si and a Raven threshold plate (essential).

Location: Bottom of double butt hinged or centre pivot double acting doors.

Min/Max Gap: 14mm to 18mm.

Finish:* Satin clear (silver) anodised aluminium (15µm) or paint at extra cost.

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws supplied.

Seal: RP3129Si. Light grey silicon rubber (SE).

Sizes: Available in stock lengths.

Approvals



Fire Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC S12C4. NZBC C/AS2 4.16.2(b). AS1530.7 & BS EN 1634-3 (similar to BS 476 section 31.1). Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "S₂₀₀".

Energy ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.

Durability Tested to over 1,000,000 operating cycles without failure.


Insects/Vermin AS4674, 2.1.5(iv), 2.1.7.

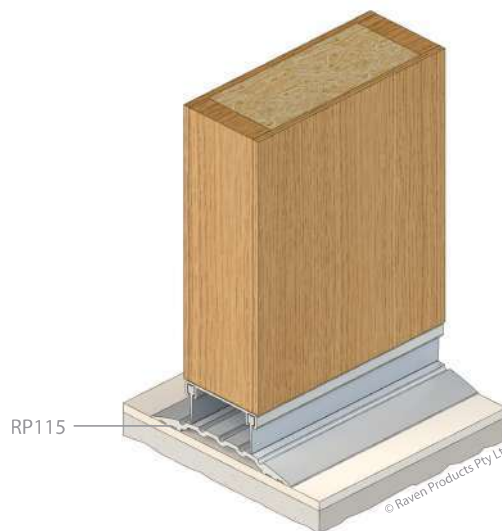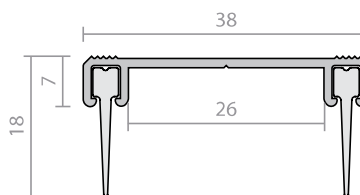


*Note: Not all finishes are available in all sizes.

Brush Strip Seals


RP2, RP2b (brush only) p.107



RP2a p.108




RP2b p.108




RP15 p.109




RP41 p.109




RP49, RP50 p.110




RP51F p.110



RP52F p.111



RP57, RP58 p.111



RP74 p.112



RP74F p.112



RP75 p.113

