

# Meeting Stile Seals

For Frameless Glass

## RP42, RP103, RP104



Clear polycarbonate astragal and perimeter seals specifically designed for frameless glass doors. The woven pile sealing strip is combined with a weather fin to form an effective weather and energy seal.

Use in conjunction with Raven brush strip door bottom seals RP2b, RP74 and threshold plates.

### Location:

**RP42** Meeting stiles of 15mm thick frameless glass doors.

**RP103** Meeting stiles of 10mm thick frameless glass doors.

**RP104** Meeting stiles of 12mm thick frameless glass doors.

**Min/Max Gap:** 7mm to 8mm (prior to installation).

**Fixing:** Self-adhesive. *Note: Contact surface must be clean, smooth and if painted, well cured. Self-adhesive seals will not adhere to oiled or alkyd finishes or to easy clean wash and wear paint surfaces.*

**Seal:** Clear high impact UV stabilised polycarbonate body with black polypropylene pile with felt weather fins.

**Sizes:** 3000mm.

### Approvals

**Energy** ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.


### Certification

**Global GreenTag** Cert™


Product Health Declaration™ (GreenTag PHD™)

PlatinumHEALTH™ HealthRATE™



### RP42



### RP103



### RP104

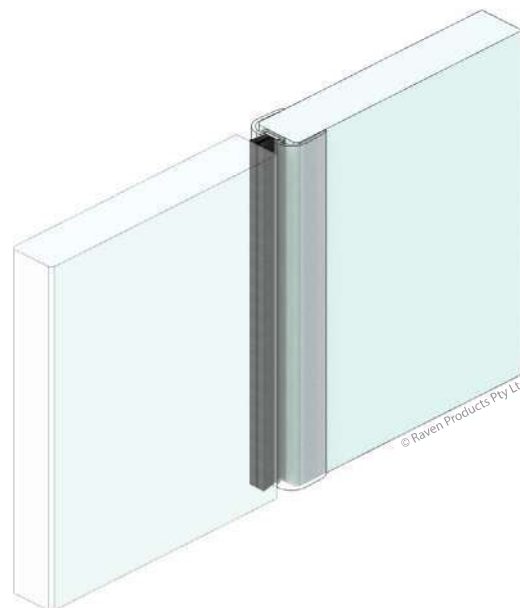

© Raven Products Pty Ltd

## RP79, RP79Si, RP79H, RP88



Aluminium astragal seals designed for frameless glass doors. The woven pile sealing strip in RP79 and RP88 is combined with a weather fin to form an effective weather and energy seal. RP79Si utilises silicon rubber fins for medium temperature smoke door applications.

Use in conjunction with Raven brush strip door bottom seals RP2b, RP74 and threshold plates.

### Location:

**RP79, RP79Si, RP79H** Meeting stiles of 12mm thick frameless glass doors.

**RP88** Meeting stiles of 10mm thick frameless glass doors.

### Min/Max Gap:

**RP79, RP79Si, RP88** 8mm to 9mm (prior to installation).

**RP79H** 8mm to 12mm (prior to installation).

### Finish:

**RP79, RP79H, RP88** Satin clear (silver) anodised aluminium (15µm).

**RP79Si** Black anodised aluminium (15µm).

### Seal:

**RP79, RP88** Black polypropylene pile with felt weather fins.

**RP79Si** RP371Si. Grey or black silicon rubber (SE).

**RP79H** RP440. Black TPE.

**Fixing:** Self-adhesive. *Note: Contact surface must be clean, smooth and if painted, well cured. Self-adhesive seals will not adhere to oiled or alkyd finishes or to easy clean wash and wear paint surfaces.*

**Sizes:** Available in stock lengths.

### Approvals

**Energy** ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.

**RP79Si** M200C BAL ≤40

**Fire** Gasket flammability index 1 when tested to AS1530.2.

**Smoke** NCC S12C4.

**RP79H** M200C BAL ≤40

**Fire** Gasket flammability index ≤ 5 when tested to AS1530.2.

**Smoke** NCC S12C4.


### Certification

**Global GreenTag** Cert™


Product Health Declaration™ (GreenTag PHD™)

PlatinumHEALTH™ HealthRATE™


### RP79





### RP88



### RP79Si



### RP79H

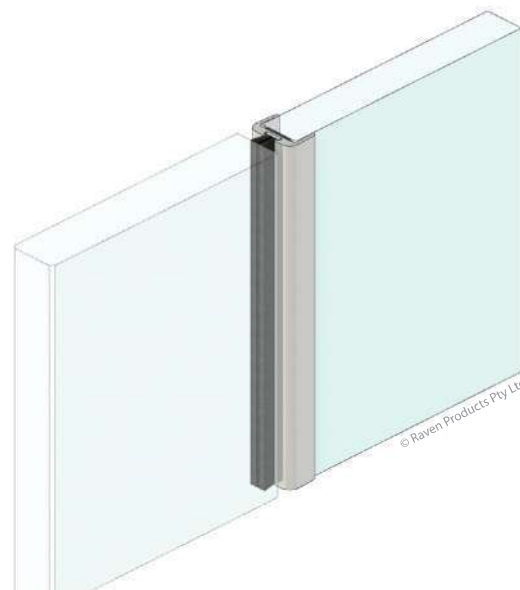

© Raven Products Pty Ltd