

# Door Bottom Sweep Seals



## RP4T



A weather seal, RP4T easily fits to the bottom of a door. It can be used in combination with threshold plates where even greater protection is required.

RP4T is particularly suitable for roll-up doors. Its fixings are concealed and its multi-blade seal defies rain infiltration.

Also available as an intumescent fire and hot smoke seal. Refer to RP114 for this feature.

**Location:** Roll-up doors. Single and double butt hinged doors or bulkhead applications. Minimum door thickness of 35mm.

**Min/Max Gap:** User determined.

**Finish:** Satin clear (silver), bronze or black anodised aluminium (15µm) or paint at extra cost.

**Fixing:** Concealed screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied. Fixing holes are pre-slotted.


**Seal:** RP404 and RP404b. Grey PVC.

**Sizes:** Available in stock lengths.

### Approvals



**Energy** NCC Pt. 3.12.3.3 & J3.4.

**Insects/Vermin** AS4674, 2.1.5(iv), 2.1.7.

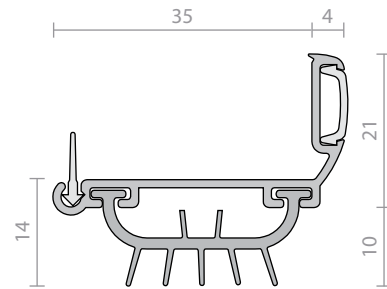

## RP114

p.107

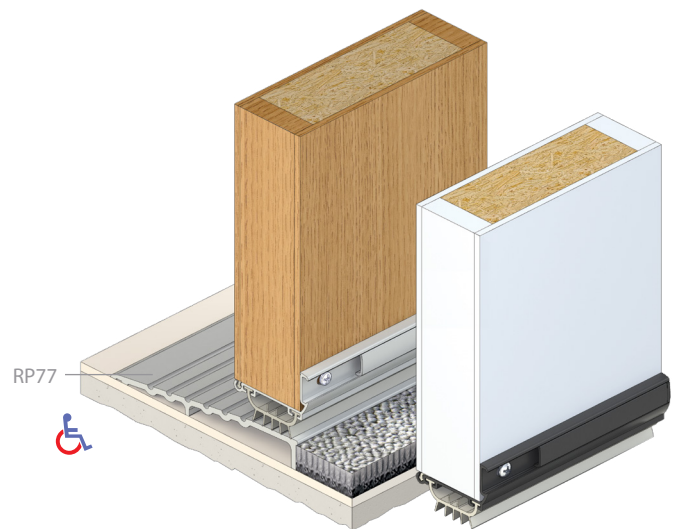

## RP5



A flexible EPDM weather strip sweep seal that fits to the bottom of doors. It is ideal for screen doors and sash windows to prevent insects from entering up the face of the glass. It is quick and easy to install to the door bottom, being fitted without removing the door. It is also ideal for garage tilt-up doors.

Can be used in conjunction with Raven RP13 and RP82 threshold plates.

**Location:** Bottom of doors, sash windows or around stiles of tilt up doors.

**Min/Max Gap:** Up to 15mm (user determined).

**Finish:** Satin clear (silver), bronze anodised aluminium (15µm) or paint at extra cost.

**Fixing:** Screw fix. Zinc plated, cross recess head S.T. screws supplied.

**Seal:** RP303. Black EPDM.

**Sizes:** Available in stock lengths.

### Approvals

**Fire** Gasket flammability index < 5 when tested to AS1530.2.

**Energy** NCC Pt. 3.12.3.3 & J3.4.

**Insects/Vermin** AS4674, 2.1.5(iv), 2.1.7.

