

RP62



A safety strip which prevents fingers being jammed on the hinge side of a door. It is fixed to the door and the jamb on the hinged side.

Note: It is recommended to fit RP62 to the full height of the door/jamb for maximum protection. For longer lengths, butt join together.

Location: Door and jamb of 0-180 degree opening butt hinged or centre pivot doors.

Finish: Satin clear (silver) anodised aluminium (15µm).

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied. Fixing holes are pre-slotted.


Seal: RP362. Black EPDM rubber.

Sizes: 2100mm.

Approvals

Durability Tested to BS 8613:2017 Class 1 Finger protection devices for pedestrian doors.

Tested to over 200,000 operating cycles without failure.

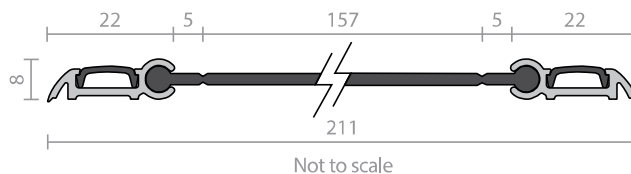

**Note: Not all finishes are available in all sizes.*

RP62BW



A safety strip which prevents fingers being jammed on the hinge side of a door. It is fixed to the door and the jamb on the hinged side.

Note: It is recommended to fit RP62BW to the full height of the door/jamb for maximum protection. For longer lengths, butt join together.

RP62BW is reversible for a brown or white finish.

Location: Door and jamb of 0-180 degree opening butt hinged or centre pivot doors.

Finish: *Satin clear (silver) anodised aluminium (15µm).

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied. Fixing holes are pre-slotted.

Seal: RP462BW. Reversible flexible brown/white PVC rubber. Brown and white flexible PVC cover strips included.

Sizes: 2500mm, 2100mm.

Approvals

Durability Tested to BS 8613:2017 Class 1 Finger protection devices for pedestrian doors.

Tested to over 200,000 operating cycles without failure.

