

Threshold Plates



RP29



RP29 is a wide, heavy duty threshold plate with a ribbed profile and integral sill gaskets. They are ideal for use with pivot hinge doors.

Can be used in conjunction with Raven door bottom seals to prevent rain, draughts, noise and smoke infiltration.

Location: Door sill.

Finish:* Satin clear (silver) anodised aluminium (25µm).

Fixing: Screw fix. Colour matched zinc plated, cross recess head CSK S.T. screws supplied.

Seal: RP404a. Grey flexible PVC.

Sizes: Available in stock lengths.

Approvals

UL R37913.

ANSI/BHMA A156.21

Access & Mobility NZ: NZBC D1/AS1 1.3.2.

UK/EU: Approved Document M.

Fire AUS/NZ: NCC S12C2. AS1530.4 & AS 1905.1. NZBC C/AS2 4.16.2(a) & App C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

Up to FRL / FRR-/240/30 & FD120.



BAL **BAL FZ** when used with a BAL rated door bottom seal in accordance with AS 3959.

Certification

Global GreenTag **Cert™**

Product Health Declaration™ (GreenTag PHD™)

PlatinumHEALTH™ HealthRATE™

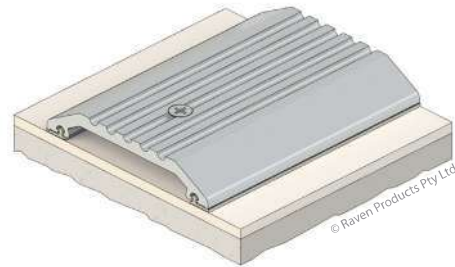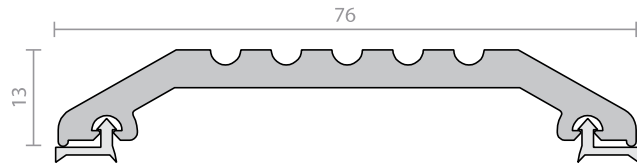

*Note: Not all finishes are available in all sizes.

RP66



A flush fitting threshold plate designed for use on internal doors with carpeted floors. The RP66 can be used in conjunction with Raven door bottom seals such as the RP38Si to provide an optimum sealing surface as carpets can flatten and thus reduce sealing effectiveness. RP66 has concealed fixings with self-adhesive aluminium insert.

Location: Door sill of internal doors with carpeted sills.

Finish:* Satin clear (silver) anodised aluminium (25µm).

Fixing: Screw fix with self-adhesive insert. Zinc plated, cross recess head CSK S.T. screws supplied.

Sizes: Available in stock lengths.

Approvals

ANSI/BHMA A156.21

Access & Mobility AUS/NZ: NCC D3D16 & D4D4. AS1428.1:2009 Part 7.2. AS1428.1:2021 Part 4.2. NZBC D1/AS1 1.3.2.

UK/EU: Approved Document M.

Fire AUS/NZ: NCC S12C2. AS1530.4 & AS 1905.1. NZBC C/AS2 4.16.2(a) & App C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

Up to FRL / FRR-/240/30.

Certification

Global GreenTag **Cert™**

Product Health Declaration™ (GreenTag PHD™)

PlatinumHEALTH™ HealthRATE™

