

# Brush Strip Seals

## Nylon Filament



### RP74



A nylon brush strip seal with a Self-adhesive aluminium holder. Mounted to the inside or outside door head and bottom face, RP74 provides a very neat sealing solution with the advantage of final on site installation which overcomes unforeseen floor or sill variation.

Used in conjunction with Raven threshold plates.

**Location:** Frames or bottoms of single, double, sliding and double acting doors. Suitable for hard, flat surfaces.

**Min/Max Gap:** Up to 13mm (user determined).

**Finish:**\* Satin clear (silver), bronze anodised aluminium (15µm) or paint at extra cost.

**Fixing:** Self-adhesive or can be screw fixed. *Note: Contact surface must be clean, smooth and if painted, well cured. Self-adhesive seals will not adhere to oiled or alkyd finishes or to easy clean wash and wear paint surfaces.*

**Seal:** Black fine, dense, UV stabilised nylon filaments.

**Sizes:** Available in stock lengths.

*\*Note: Not all finishes are available in all sizes.*

#### Approvals

**Fire AUS/NZ:** NCC S12C2. AS1530.4 & AS 1905.1.

**Up to FRL / FRR-/120/30 & FD120.** Brush Strip flammability index 1 when tested to AS1530.2.

**Energy** ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.



**BAL ≤FZ** BAL FZ when used on a garage door or on an approved side hung fire door in accordance with AS 3959.

#### Certification

**Global GreenTag** Cert™

Product Health Declaration™ (GreenTag PHD™)

BronzeHEALTH™ HealthRATE™

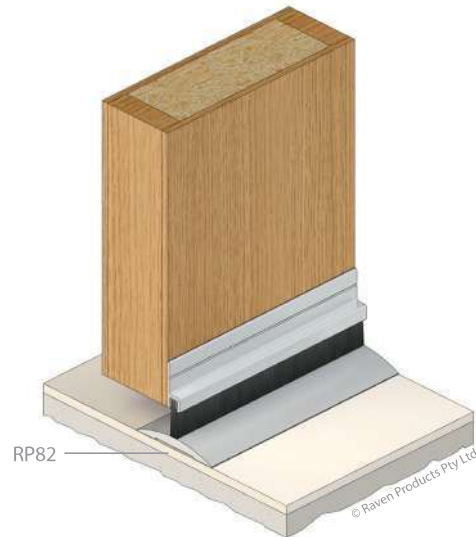

### RP74F



A nylon brush strip seal that is ideal for sliding or double acting doors. Can also be used for the stiles of tilt-up doors. The brush houses a unique medium temperature fin, which is effective in the sealing of medium temperature smoke, noise and weather.

Used in conjunction with Raven threshold plates.

**Location:** Frames or bottoms of single, double, sliding and double acting doors as well as stiles of tilt up doors. Suitable for hard, flat surfaces.

**Min/Max Gap:** Up to 13mm (user determined).

**Finish:**\* Satin clear (silver), bronze, black anodised aluminium (15µm) or paint at extra cost.

**Fixing:** Self-adhesive or can be screw fixed. *Note: Contact surface must be clean, smooth and if painted, well cured. Self-adhesive seals will not adhere to oiled or alkyd finishes or to easy clean wash and wear paint surfaces.*

**Seal:** Black fine, dense, UV stabilised nylon filaments with a medium temperature smoke barrier fin.

**Sizes:** Available in stock lengths

#### Approvals

**Fire AUS/NZ:** NCC S12C2. AS1530.4 & AS 1905.1.

**Up to FRL / FRR-/120/30 & FD120.** Brush Strip flammability index 1 when tested to AS1530.2.

**Smoke** NCC S12C4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "S<sub>200</sub>".

**Energy** ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.

**BAL ≤FZ** BAL FZ when used on a garage door or on an approved side hung fire door in accordance with AS 3959.

#### Certification

**Global GreenTag** Cert™

Product Health Declaration™ (GreenTag PHD™)

BronzeHEALTH™ HealthRATE™

