

## RP54



A heavy duty storm proof weather seal ideal for residential and commercial applications where maximum weather protection is required. The RP54 (Daniels Patent) is a door bottom seal and threshold plate combination suitable for inward opening butt hinged doors.

Can be used in conjunction with Raven door frame or perimeter seals.

**Location:** Bottom of single and double inward opening butt hinged timber doors. Minimum door thickness of 35mm.

**Min/Max Gap:** 22mm to 25mm.

**Finish:** Satin clear (silver) anodised aluminium (25µm).

**Fixing:** Screw and nail fix. Zinc plated, cross recess head S.T. screws and zinc plated nails supplied.

**Seal:** RP354. Black EPDM. RP404a. Grey flexible PVC.


**Sizes:** Available in stock lengths.

### Approvals

**Access & Mobility NZ:** NZ BC Compliance Doc. D1/AS1 1.3.2.

**Energy** NCC Pt. 3.12.3.3 & J3.4.

**Insects/Vermin** AS4674, 2.1.5(iv), 2.1.7.

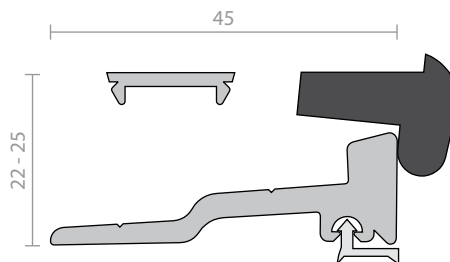

## RP81



A heavy duty EPDM sweep seal for door bottoms of outward opening doors with large gaps up to 120mm. Ideal for industrial sliding doors and gates. This seal has slotted holes for adjustment with a push-in cover strip for concealment of fasteners.

The RP81 is ideal for use in conjunction with Raven threshold plates RP82 and RP29.

**Location:** Bottom of single and double outward opening doors or industrial sliding doors and gates.

**Min/Max Gap:** Up to 120mm (seal can be slit to suit on site).

**Finish:** Satin clear (silver) anodised aluminium (15µm).

**Fixing:** Screw fix. Zinc plated, cross recess head S.T. screws supplied.

**Seal:** RP381. Black EPDM.

**Sizes:** Available in stock lengths.

### Approvals

**Energy** NCC Pt. 3.12.3.3 & J3.4.

**Insects/Vermin** AS4674, 2.1.5(iv), 2.1.7.

