

RP78HSi



This medium temperature smoke seal is designed for clean room and health care facilities. RP78HSi has an easy wipe clean design where the smooth sealing gasket also contains an antimicrobial additive for maximum protection against surface bacteria.

For installation on door stops. Its aluminium carrier is sturdy and slotted for adjustment with concealed fixings. It is quick and easy to install around the jamb and head and can be fitted without removing the door. The RP78Si can be mitred or butt jointed for a neat finish.

Can be used in conjunction with the Raven RP8Si, RP16Si, RP35Si, RP38Si, RP99Si, RP126Si, RP127Si or RP128Si automatic door bottom seals.

Location: Head and jambs of single and double butt hinged doors.

Min/Max Gap: 0mm to 6mm.

Finish:* Satin clear (silver) anodised aluminium (15µm) or paint at extra cost.

Fixing: Concealed screw fix. Zinc plated, cross recess head S.T. screws, self drilling screws (metal) and cover strip supplied.

**Note: Not all finishes are available in all sizes.*

Seal: RP394HSi. Grey or light grey silicon rubber (SE).

Sizes: Available in door set sizes.

Approvals

Certifire CF 5710.

Fire AUS/NZ: NCC S12C2. AS1530.4 & AS 1905.1. NZBC C/AS2 4.16.2.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

Up to FRL / FRR-/240/30 & FD240. 🔥
Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC S12C4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "S₂₀₀".

Energy ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.



Certification

Global GreenTag Cert™

Product Health Declaration™

(GreenTag PHD™)

PlatinumHEALTH™ HealthRATE™

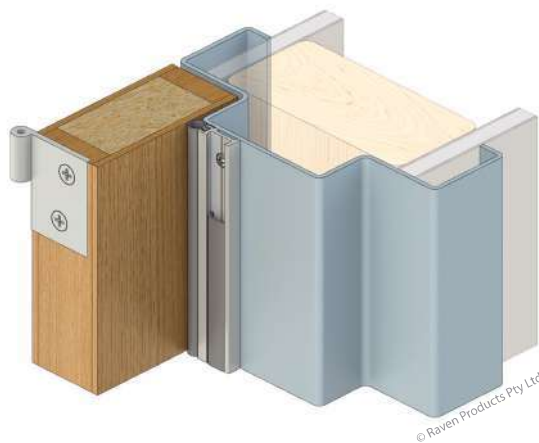

© Raven Products Pty Ltd

RP84Si



This medium temperature smoke seal is designed specifically for clean room and health care facilities. RP84Si has an easy clean smooth bulb which also contains an antimicrobial additive for maximum protection against surface bacteria. RP84Si significantly reduces sound transmission and helps prevent the movement of airborne contaminants allowing for controlled air ventilation.

The RP84Si is ideal for use in conjunction with Raven door bottom seals and astragals.

Location: Head and jambs of single and double butt hinged doors.

Min/Max Gap: 0mm to 7mm.

Finish:* Satin clear (silver) anodised aluminium (15µm) or paint at extra cost.

Fixing: Concealed screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied.

Seal: RP384Si. Black silicon rubber (SE).

Sizes: Available in door set sizes or stock lengths.

Approvals

UL R37913.

Certifire CF 5710.

Acoustic AUS/NZ: NCC F7D6.

UK/EU: Approved Document E. Rated to BS EN ISO 717-1.

Fire AUS: NCC S12C2. AS1530.4 & AS 1905.1.

Up to FRL / FRR-/120/30 & FD240. 🔥
Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC S12C4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "S₂₀₀".

Energy ABCB Housing Provisions Standard 2022 13.4.4 & NCC J5D5.



Certification

Global GreenTag Cert™

Product Health Declaration™

(GreenTag PHD™)

PlatinumHEALTH™ HealthRATE™

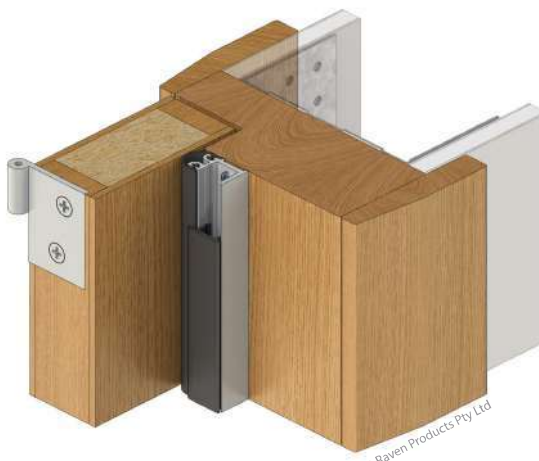

© Raven Products Pty Ltd