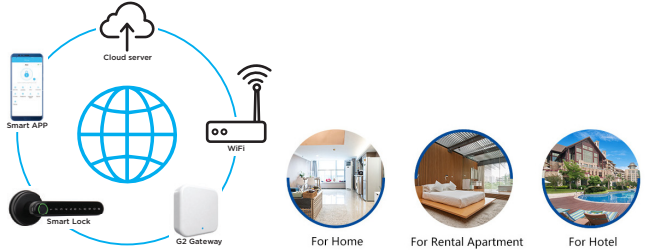# Optional gateway set up - For Remote WiFi Controlling

The *ELEV64* in it's primary condition is controlled by Bluetooth requiring the user to be within proximity of the bound locks to Change Passcodes, Add Fingerprints , Review audit trails & Create Temporary Passkeys etc.
To Manage these lock functions remotely anywhere, the Art. Id: G2-GATE can be purchased seperately.

Cloud server

Smart APP

WiFi

Smart Lock

G2 Gateway

For Home

For Rental Apartment

For Hotel

GATEWAY G2

|	
Model :	G2
Dimensions :	70mm x 70mm x 26mm
Network :	WiFi 2.4G
IEEE standard :	802.11 b/g/n
Power interface :	Type-C USB
Power input :	5V/500mA

Light Status

When the Gateway is powered on:

● ● Flashing Red/Blue lights: Stand-by mode - Ready to Pair
● Blue light: Normal mode
● Red light: Network failure

---

1 Open the APP

APP

2 Touch the " ☰ " icon on the top left of the screen

3 Select [Gateway]

Gateway
Custom
setting

4 Select G2

Gateway

G2

---

5 Plug in the Gateway and power it on

6 While the light is flashing in red and blue, press"+" sign

Add Gateway
AIDJUNV62SJ Online
AIDJUNV62SJ Online
AIDJUNV62SJ Online

7 Add Gateway

Add Gateway
WIFI
WiFi password
Gateway name
Next

8 Select the network and input your WiFi password

Add Gateway
WIFI
WiFi password
cancel network
✓ sciener
mywifi
sciener-x