


Set-up Information - *with* Quick release privacy escape function

1) Determine the correct position for the latch tongue to engage the door


If necessary unscrew the two screws on the case that hold the latch tongue in position, this will detach the latch from the mechanism. Pull out and reverse the latch into the desired position then re-screw tightly to secure the latch into the mechanism.



2) Set-up the lock for the quick release privacy function.

Locate the Handing screw. The handing screw should be inserted on the side of the lock that is positioned on the **inside** of the door (using the allen key provided to un/screw.) *This will engage the quick release privacy function.*
(The other side of the lock will be on the external side of the door and will not have a screw in this hole - the other side of the door will be locked.)

Handing Screw should be on **internal** side of the lock to engage the privacy quick release function.

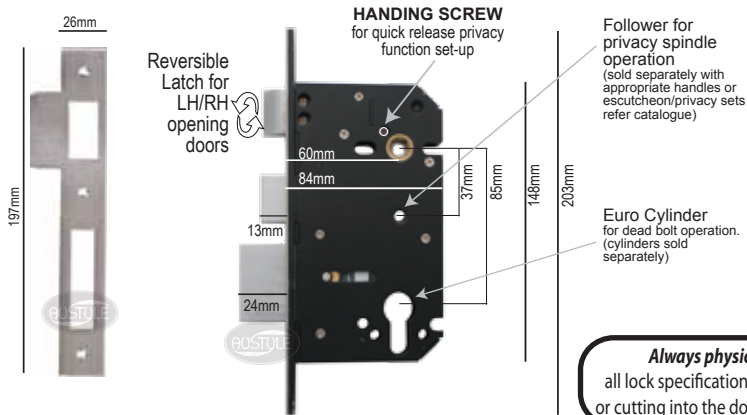

Always physically check
all lock specifications **prior** to drilling
or cutting into the door for installation.

