

MORE THAT JUST QUALITY — AN EXPERIENCE™



## FUTURA APOLLO LEVER SET

Component: 1 Pair Lever Set



### Description:


- 15-Year Warranty: Futura Door Furniture is covered for 15 years internally and 10 years externally. If defective, Zanda will replace it for free.
- Ergonomic design for user comfort
- Modern European design
- Ideal for elderly
- Backsets are 60mm. Specify if otherwise.
- Suit domestic and light commercial application
- Suits 25mm hole size

### Available Set:

- Lever Set
- Passage Set
- Separate Privacy Set
- Integrated Privacy Set
- Dummy Set
- Entrance Set

### Available Finish:

- Brushed Nickel
- Satin Chrome
- Graphite Nickel
- Matt Black

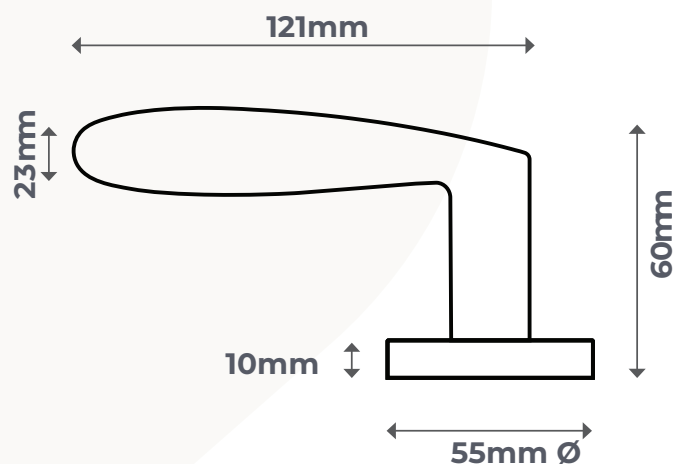

Note: Measurements are in mm

1 300 926 321



sales@zanda.com.au




www.zanda.com.au




MORE THAT JUST QUALITY — AN EXPERIENCE™

FUTURA  
**APOLLO**  
LEVER SET

Component: 1 Pair Lever Set





1. Remove the rose cover from the handle.  
For the round roses unscrew rose cover.  
For the square roses (Elite) unscrew the grubscrew on the side of the rose and pop off the rose cover.




2. Remove the screws with the red screw head.





3. Remove the rapidFIT boss from the handle.

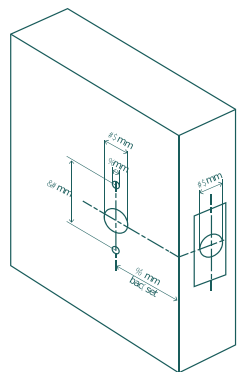

4. Measure the door thickness and mark the centre at the desired height for the latch.
5. Drill a 25mm (1") diameter hole through the door edge to a depth of at least 90mm. Ensure this hole is square to the door.
6. Mark the face of the door each side for drilling a 25mm diameter spindle hole. The centre of the spindle hole will need to be 60mm from the door edge (backset). Mark two 6mm screw holes at 21mm above and below the centre of the spindle hole. For clean cut-outs, drill from both sides, meeting in the middle of the door.

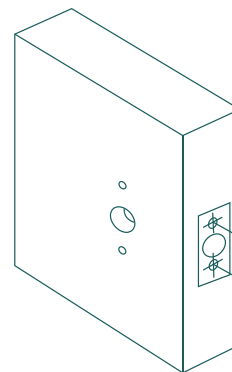

7. Insert the latch, scribe around the faceplate, remove, then chisel out recess to enable the latch faceplate to sit flush with the door edge.
8. Remove any loose saw dust, insert the latch and secure it with the wood screws provided.

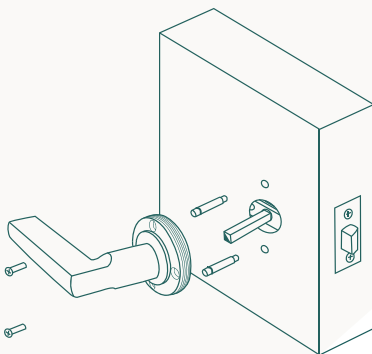

9. Unscrew the rose covers from the levers and unscrew the bolts from the threaded sleeves.


10. Insert the spindle into the latch so an even amount protrudes on each side of the door. Ensure the grooved side of the spindle will align with the grubscrews on the handles.

11. Insert the threaded sleeves into the oval holes in the back of the rose at two vertical positions. Screw the short bolts from the top of the rose through into the threaded sleeves.

12. Slide the handle over the spindle and press against the door.




Note: The grubscrews may need a re-tighten after a bedding-in period. We recommend medium strength thread-lock to be used. Windsor code:1276



13. Insert the handle on the opposite side of the door over the spindle and tighten the long bolts through the rose into the threaded sleeves.


14. Screw the rose covers onto the handles and tighten the grubscrews on the side of the levers onto the spindle for each side of the door. For the square rose (Futura Elite) press on the rose covers and tighten the grubscrews on the side of the rose.

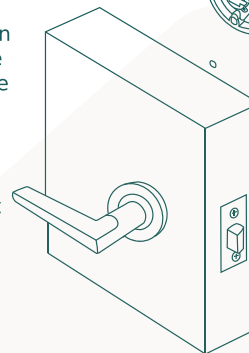

15. Close the door against the frame and mark the latch position for fitting of the striker.

16. Router or chisel so the striker fits flush, allowing for the plastic dustbox behind the striker.

17. Secure the striker with the wood screws provided. Test the door and if necessary, adjust the striker anti-rattle tab to take up any rattle.



1 300 926 321



sales@zanda.com.au



www.zanda.com.au



Note: Measurements are in mm