Deadbolts





We take the worry out of

protecting what's valuable to you. Lockwood: *no worries*®





www.lockweb.com.au





page 3



Paradigm[®] Pull Handle Lockset Deadbolt

page 7



Paradigm[®] Pull Handle Lockset Deadlatch

page 9



Pull Handle Lockset Dummy Handle

page 11





Symmetry[®] Deadbolt Single Cylinder

page 14

2



page 16







The Paradigm® 005 Double Cylinder Deadbolt is the premium security solution with its innovative safety features. The contemporary styling can be combined with any lever or entrance handle to create an elegant security solution, ideal for residential and architectural applications.

Key Features

- Three function modes with DualSelect[®] provides combination of convenience and security
- High security cut resistant stainless steel bolt
- Safety Release[™] automatically unlocks internal knob upon key entry from outside
- LockAlert[®] indicator shows lock status at a glance
- Available in round or square rose


Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



| Backset | 60 to 70mm adjustable stainless steel bolt | |
|----------------|--|--|
| Bolt | High security, cut resistant stainless steel bolt | |
| Cylinder | 5 pin tumbler mechanism. Brass cylinder and brass barrel | |
| Door Thickness | 32–48mm 32–36mm doors require a spacer (Included) | |
| Finishes | Chrome Plate (CP) Satin Chrome Pearl (SP) Satin Chrome Brushed (SC) Everbrass (EVB) Satin Stainless Steel (SSS) * | |
| Keying | Supplied individually keyed with two keys per lock, 78,000 key combinations, Key blank KB2015P | |
| Materials | High purity zinc alloy. Stainless steel version features 304 grade satin stainless steel rose, turn knob and trim | |
| Strike | Box strike with concealed crossgrain door frame strengthening screw | |

*Satin Stainless Steel version only available in round rose.

Standards and Compliance

| S∟8 | (Security) Australian Lock Standard (AS4145.2 - 2008) |
|-----|--|
| D8 | (Durability) Australian Lock Standard (AS4145.2 - 2008) |
| C6 | (Corrosion) Australian Lock Standard AS4145.2 - 2008) |
| К5 | (Key Security) Australian Lock Standard AS4145.2 - 2008) |







Round Rose











Exterior

Interior


*32–36mm door thickness requires spacer ring (included)

32



Kinetic Defence® Bump and pick resistant.

DualSelect[®] Turn the key for safety mode. Turn the key further to select secure mode.





Anti-Corrosion Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.

LockAlert[®] Interior Indicator shows lock status at a glance.




Safety Mode Securely locked from outside and free from inside.



4

Secure Mode Securely locked from both inside and outside. For when nobody is home.



Counterbalance Bolt Proportionally distributes the load between the door and door frame.



2 Keys Included Can be keyed alike to other Lockwood door locks.

Retrofitable



Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable


backset. 32-48mm door thickness.





Square Rose











Exterior

Interior

*32–36mm door thickness requires spacer ring (included)

32



Kinetic Defence[®] Bump and pick resistant.

DualSelect® Turn the key for safety mode. Turn the key further to select secure mode.





Anti-Corrosion Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.


LockAlert® Interior Indicator shows lock status at a glance.



Safety Mode Securely locked from outside and free from inside.



Secure Mode Securely locked from both inside and outside. For when nobody is home.






Counterbalance Bolt Proportionally distributes the load between the door and door frame.



2 Keys Included Can be keyed alike to other Lockwood door locks.




Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



Ordering Procedure–Lever Sets


Sample part number 005/B1CPDP is made up of several sections. Choose your product by selecting an option from each section.

Paradigm[®] 005 Double Cylinder Deadbolt

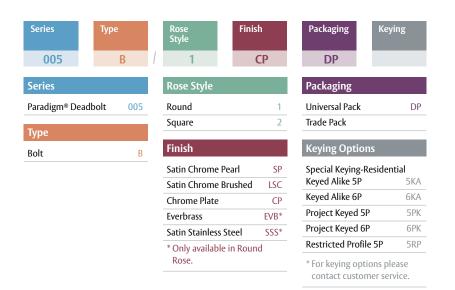



Paradigm[®] Pull Handle Lockset - Deadbolt

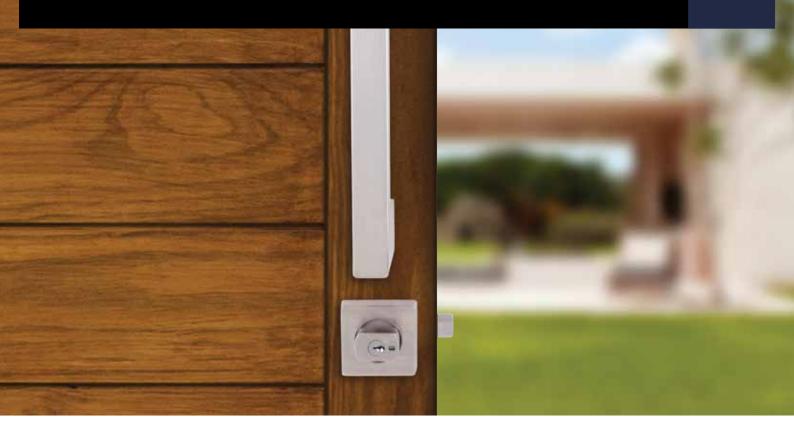

The Australian designed Paradigm[®] Pull Handle Lockset expresses superior state-of-the art design featuring a contemporary style that delivers exceptional safety and security.

Suitable for residential, new building and renovation market applications.

The Pull Handle lockset incorporates innovative safety features from the Paradigm 005 Deadbolt and is manufactured with high end 304 grade stainless steel that comes in a brushed satin finish.

Key Features

- Three function modes with DualSelect[®] provides combination of convenience and security
- High security cut resistant stainless steel bolt
- Brushed 304 Grade Stainless Steel Pull Handles
- Concealed screw fixings gives a neat and clean appearance
- Safety Release[™] automatically unlocks internal knob upon key entry from outside
- LockAlert[®] indicator shows lock status at a glance

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

| Product Details | | |
|-----------------|--|--|
| Dimensions | External handle length - 600mm Internal handle length - 500mm Handle width - 30mm | |
| Backset | 60mm-70mm adjustable | |
| Bolt | High security cut resistant | |
| Cylinder | 5 pin tumbler mechanism Brass cylinder and brass barrel | |
| Door Thickness | 32 - 48mm 32-36mm doors require a spacer (Included) | |
| Finishes | Satin Stainless Steel (SSS) | |
| Materials | 304 Grade Stainless Steel | |
| Strike | Box strike with concealed crossgrain door frame strengthening screw | |
| Magnets | Door Magnets included to hold the door(s) in position when in passage mode (free to enter from outside and free to exit from inside) | |
| Keying | Supplied individually keyed with two keys per lock 78,000 key combinations Key blank KB2015P | |

Standards and Compliance

| S∟8 | (Security) Australian Lock Standard (AS4145.2 - 2008) |
|-----------|---|
| D8 | (Durability) Australian Lock Standard (AS4145.2 - 2008) |
| C6 | (Corrosion) Australian Lock Standard AS4145.2 - 2008) |
| К5 | (Key Security) Australian Lock Standard AS4145.2 - 2008) |



Purchase Lockwood products through Access Hardware to earn 1 Qantas Point per \$1 spent for your business*

Paradigm[®] Pull Handle Lockset - Deadbolt



Exterior

Interior



DualSelect[®] Turn the key for safety mode. Turn the key further to select secure mode.



SafetyRelease™ Minimises the risk of being locked in.




Corrosion Resistant Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



8

Kinetic Defence® Bump and pick resistant.

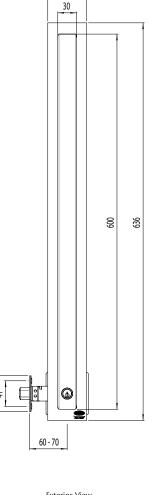



Proportionally distributes the load between the door and door frame.





Counterbalance Bolt

Door Thickness 32mm to 48mm.



25.6

32-48 Door Thickness

Side View

32

62

65

30

•

67.6

Interior View

500

LockAlert® Interior Indicator shows lock status at a glance.

67.6



Safety Mode Securely locked from outside and free from inside.



Secure Mode Securely locked from both inside and outside. For when nobody is home.



Passage Mode

Free to enter from outside and free to exit from inside.

25YEAK

57.2








62



Paradigm[®] Pull Handle Lockset - Deadlatch

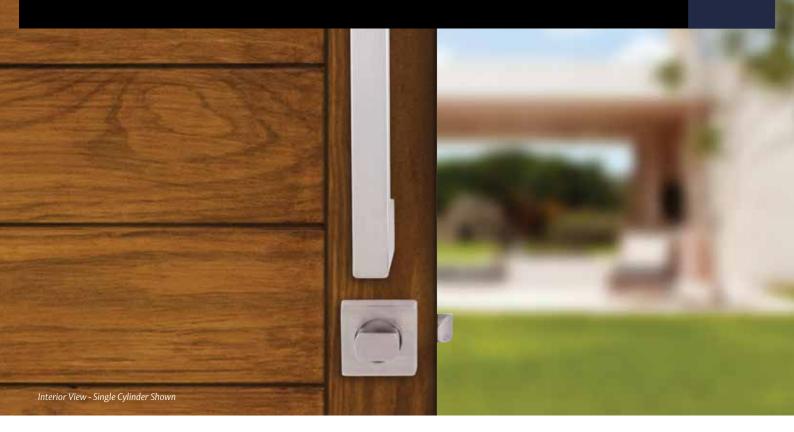

The Australian designed Paradigm[®] Pull Handle Lockset expresses superior state-of-the art design featuring a contemporary style that delivers exceptional safety and security. The Paradigm[®] Pull Handle latching lockset is available in single and double cylinder variants.

Both variants are specifically designed for semi-commercial and apartment building applications. The locksets have been successfully tested up to 2 hours (depending on the type of doorset) on fire assemblies in accordance with Australian Standard AS1905.1-2005, part 1:Fire Resistant Doorset.

The Pull Handle lockset applies the innovative safety features from the Paradigm 005 Deadbolt into a latching lockset and is manufactured with high end 304 grade stainless steel that comes in a brushed satin finish.

Key Features

- High security cut resistant Stainless Steel latch
- Brushed 304 grade Stainless Steel Pull Handle
- Concealed screw fixings for a neat and clean appearance
- Safety Release[™] automatically unlocks internal knob upon key entry from outside^{*}
- LockAlert[®] indicator shows lock status at a glance*

*Only available in double cylinder variant

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

| Product Details | | |
|-----------------|--|--|
| Dimensions | External handle length - 600mm Internal handle length - 500mm Handle width - 30mm | |
| Backset | 60mm | |
| Latch | High security cut resistant Stainless Steel deadlatch | |
| Cylinder | 5 pin tumbler mechanism Brass cylinder and brass barrel | |
| Door Thickness | 32-48mm 32-36mm require a spacer (included) | |
| Finishes | Satin Stainless Steel (SSS) | |
| Materials | 304 Grade Stainless Steel | |
| Keying | Supplied individually keyed with two keys per lock 78,000 key combinations Key blank KB2015P | |

Standards and Compliance

| The Paradigm Pull Handle latching Lockset has been successfully tested up to 2 hours (depending on the type of doorset) on fire assemblies in accordance with Australian Standard AS1905.1-2005, part 1: Fire Resistant Doorset for commercial applications. |
|--|
| (Security)Australian Lock Standard (AS4145.2 - 2008) |
| (Durability) Australian Lock Standard (AS4145.2 - 2008) |
| (Corrosion) Australian Lock Standard AS4145.2 - 2008) |
| (Key Security) Australian Lock Standard AS4145.2 - 2008) |
| |

accesshardware Rewards



Purchase Lockwood products through Access Hardware to earn 1 Qantas Point per \$1 spent for your business*

Paradigm[®] Pull Handle Lockset - Deadlatch

Pull Handle Lockset



Exterior Cylinder

Interior Double Interior Single Cylinder




SafetyRelease[™]* Minimises the risk of being locked in.



Kinetic Defence® Bump and pick resistant.



Corrosion Resitant Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.

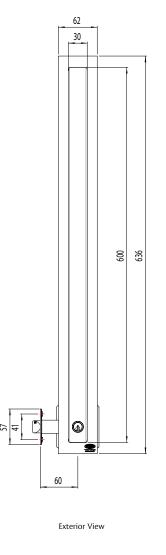


Door Thickness


32mm to 48mm.


2 Keys Included

Can be keyed alike to other

Lockwood door locks.







Interior View (Single Cylinder)



LockAlert[®]* Interior Indicator shows lock status at a glance.



Safety Mode Securely locked from outside and free from inside.




Secure Mode* Securely locked from both inside and outside. For when nobody is home.

* Not available for Single Cylinder variant



Paradigm[®] Pull Handle Lockset - Dummy Handle

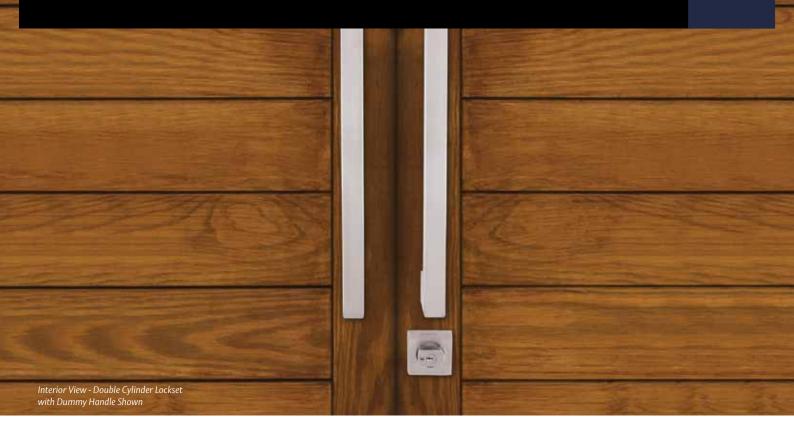

The Australian designed Paradigm® Pull Handle Lockset expresses superior state-of-the art design featuring a contemporary style that delivers exceptional safety and security. The Paradigm[®] Dummy Handle is designed to be used along side the Paradigm Pull Handle lockset in double door applications.

Manufactured with high end 304 grade Stainless Steel that comes in a brushed satin finish, the Paradigm Dummy Handle provides premium quality with contemporary styling for modern double door entrances.

Key Features

- Brushed 304 grade Stainless Steel Pull Handle
- Concealed screw fixings for a neat and clean appearance

| Product Details | |
|-----------------|---|
| Dimensions | External handle length - 600mm Internal handle length - 500mm Handle width - 30mm |
| Door Thickness | 32-48mm |
| Finishes | Satin Stainless Steel (SSS) |
| Materials | 304 Grade Stainless Steel |






Paradigm[®] Pull Handle Lockset - Dummy Handle



Dummy Handle

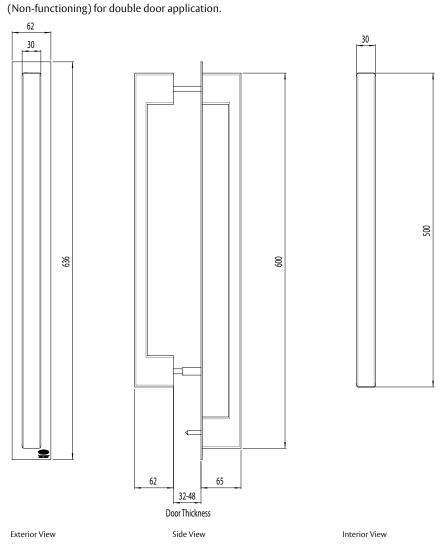



Interior



Corrosion Resitant Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.

Door Thickness 32mm to 48mm.




Paradigm[®] Pull Handle Locksets

Ordering Procedure

Sample part number 005/DPHBSSS5PK is made up of several sections. Choose your product by selecting an option from each section.

Paradigm[®] Pull Handle Locksets

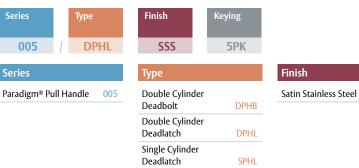

Dummy Handle

PHD

| ish | |
|-------------------|-----|
| n Stainless Steel | SSS |

| Keyed to Differ (Standard) | |
|----------------------------|-----|
| Special Keying-Residential | |
| Keyed Alike 5P | 5KA |
| Keyed Alike 6P | 6KA |
| Project Keyed 5P | 5PK |
| Project Keyed 6P | 6PK |
| Restricted Profile 5P | 5RP |

Keying Options



Symmetry[®] Deadbolt



Description

The Symmetry general purpose Deadbolts are standard security products that should be fitted with a Key in Knob or Key in Lever lockset for added safety and security.

Keying


- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Bolt Dimensions



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45mm door thickness.



| Product Details | |
|-----------------|--|
| Backset | 60mm to 70mm adjustable bolt |
| Bolt | Solid brass bolt with 25mm projection. Hardened insert in locking bolt |
| Cylinder | The one cylinder assembly solution "OneCyl®" has been designed for the Lockwood Symmetry Range, which grants the convenience of cylinder interchangeability. C4 brass cylinder assembly (6 pin compatible) |

Symmetry Everbrass® Guarantee

Symmetry 5 Year Finish Guarantee



Lockwood Everbrass® product is coated both on the exterior and interior surfaces with a lifetime anti-tarnish finish. Lockwood warrants that Everbrass® branded product will not corrode, tarnish or discolour for a lifetime when properly installed and subject to no more than fair wear and tear.



Lockwood guarantees to replace Symmetry product if within five years from the proven date of purchase it tarnishes, discolours or corrodes when properly installed and subject to no more than fair wear and tear.





Symmetry[®] Deadbolt


Single Cylinder











Exterior

Interior



Kinetic Defence® Bump and pick resistant.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45 door thickness.

| Finish | Trade Pack | Display Pack |
|--------------------------|------------|--------------|
| Polished Brass | 7106PB | 7106PBDP |
| Polished Stainless Steel | 7106PSS | — |
| Satin Stainless Steel | 7106SSS | 7106SSSDP |
| Satin Chrome Brushed | 7106SC | _ |

| Product Details | |
|-----------------|---|
| Door Thickness | 31mm to 45mm 31 to 41mm requires spacer ring (included) |
| Finishes | Polished Brass (PB) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Satin Chrome Brushed (SC) |
| Handing | Suits left or right hand opening doors |
| Keying | Operated by key from outside and turn knob inside |







Symmetry[®] Deadbolt

Double Cylinder









Exterior

Interior



Kinetic Defence[®] Bump and pick resistant.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45mm door thickness.

ONECYL® Cylinder Solution

| Finish | Trade Pack | Display Pack |
|--------------------------|------------|--------------|
| EverBrass | 7107EVB | 7107EVBDP |
| Polished Stainless Steel | 7107PSS | 7107PSSDP |
| Satin Stainless Steel | 7107SSS | 7107SSSDP |

Product Details


| Door Thickness | 31mm to 45mm *31 to 41mm requires spacer ring (included) |
|----------------|---|
| Finishes | EverBrass (EVB) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) |
| Handing | Suits left or right hand opening doors |
| Keying | Operated by key from both inside and outside |




Symmetry[®] Deadbolt - Accessory

| Adjustable 60-7 | 0mm | Backset Bolt |
|-----------------|-----|--------------|
|-----------------|-----|--------------|

| Part Number | 7541ASSS |
|-------------|-----------------------|
| Finish | Satin Stainless Steel |











AECHANICA

Lockwood is the leading brand in the Australian locking industry. With an established reputation for high quality products, this iconic brand provides a wide range of locking solutions to residential housing, commercial, semi-commercial, building and industrial application markets. Lockwood is supported by an extensive distribution and after-sales support network. Our customers include retailers, architects, trade and industrial personnel, locksmiths and security dealers.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.

The Lockwood 25 Year Mechanical Warranty

Our belief that we manufacture the finest premium products available in today's market place is backed by the Lockwood 25 Year Mechanical Warranty, ensuring that Lockwood continues to keep Australians safe by delivering security and peace of mind.

For warranty terms and conditions, please visit www.lockweb.com.au or call 1300WARRANTY

ASSA ABLOY Australia Pty Ltd 235 Huntingdale Road Oakleigh, Victoria, 3166 Australia

1300 LOCK UP (1300 562 587) lockweb.com.au

ASSA ABLOY New Zealand Ltd 6 Armstrong Road Albany, Auckland, 0632 **New Zealand**

info.nz@assaabloy.com Telephone +64 9415 7111 assaabloy.co.nz

CHACCESSHARDWARE | BUSINESS



*A business must be a Qantas Business Rewards member to earn Qantas points for business. Membership and Qantas Points are subject to Qantas Business Rewards Terms and Conditions at gantasbusinessrewards.com/terms and Access Hardware Terms and Conditions at www.accesshardware.com.au/gbr

Customer Service 1800 555 600

Locksmithing 1800 555 700

Disclaimer

Whilst every effort has been made to ensure that the information (including product images and drawings) contained in this brochure is accurate at the time of publication, ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") recommends that you consult ASSA ABLOY or its agents prior to placing an order to ascertain current information on specific products, as ASSA ABLOY reserves the right to make changes without notice. ASSA ABLOY will not be liable for any injury, loss or damage whatsoever, arising from any errors or omissions in the information contained in the brochure or arising from the use or application of the information contained herein. © 2017 copyright by ASSA ABLOY All rights reserved

