

General Hardware



We take the worry out of
protecting what's valuable to you.
Lockwood: *no worries*[®]



ASSA ABLOY

25YEAR

MECHANICAL
WARRANTY

www.lockweb.com.au

Contents



Braille Signage Male

page 7



Braille Signage Female

page 7



Braille Signage Unisex

page 7



Braille Signage Shower

page 7



Braille Baby Change

page 8



Braille Signage Disabled

page 8



Braille Signage Unisex
Disabled Left Hand Transfer

page 8



Braille Signage Unisex
Disabled Right Hand Transfer

page 8



Handrail Bracket

page 10



Cabin Hooks

page 10



L45 Hat and Coat Hook

page 11



L432 Door Bumper and Hook

page 11

Contents



L1310 Combined Hat and Coat Hook

page 11



L1320 Combined Hat and Coat Hook

page 11



296 Hat and Coat Hook

page 12



297 Bumper and Hook

page 12



L94 Robe Hook

page 13



L825 Robe Hook

page 13



100 Series Architectural Hinges

page 14



140 Door Chain Lock - Key Operated

page 21



150 Door Chain and Bolt

page 21



A280 Door Stop

page 22



A290 Door Stop

page 22



A292 Door Stop Packer

page 23

Contents



A300 Door Stop

page 23



A310 Door Stop

page 24



A320 Door Stop

page 24



A330 Door Stop

page 25



A350 Door Stop

page 25



857 Door Stop

page 26



Kickplates

page 27



Security Door Viewer - Glass Lens

page 29



7580 Roller Bolt

page 30



6260 Privacy Bolt

page 32



5260 Tubular Latch

page 34



Auto Shoot Bolt

page 36

Contents



Flush Pulls

page 38



Cupboard Handles
CH1, CH2 and CH3

page 42



CK1 Cupboard Knob

page 45

Braille Signage



Description

Lockwood Braille Signage is designed in Australia to meet requirements for Braille and tactile signage applications.

Braille Signage

Each plate consists of embossed tactile design, English text and braille lettering. The embossed components use standard imagery and fonts to ensure vision impaired non-braille readers can decipher the sign.

The standard braille locator symbol is on the left hand side of the plate in line with the braille elements.

Braille elements are embossed, not engraved, glued on or made of individual components which can be separated from the sign surface.

Style and Variety

The Lockwood range of Braille and tactile signs are available in seven designs to suit a range of applications. Available designs are:

- Female
- Male
- Disabled
- Unisex
- Shower
- Baby Change
- Unisex Disabled

Product Details

Dimensions

The Lockwood Braille Signage is 162mm x 162mm making them the ideal complement to Lockwood 200 Series and 202 Series Artefact Furniture. Sign corners and all embossed elements incorporate rounded corners to ensure a positive tactile experience.

Finish

Lockwood Braille Signage is supplied with white tactile elements on a blue background allowing for luminous contrast.

Materials

Lockwood Braille Signage is made from robust and durable ABS plastic enabling for single piece construction to resist picking and/or adhesive failure. This also provides a continuous, bleach resistant sign surface for ease of cleaning and subsequent improved hygiene.

Mounting

Fixing Lockwood Braille Signage couldn't be easier as each plate is supplied with a single piece adhesive backing enabling simple "peel-off and stick" mounting. Signs should not be located on the door itself but rather on the wall adjacent to the door on the latch side, a minimum of 50mm from the frame. The tactile and Braille components of the signs should be positioned between 1200mm and 1600mm from the floor.

Braille Signage

Braille Signage Male

Part Number	BRS0700
Dimensions	162mm x 162mm



Braille Signage Female

Part Number	BRS0701
Dimensions	162mm x 162mm



Braille Signage Unisex

Part Number	BRS0703
Dimensions	162mm x 162mm



Braille Signage Shower

Part Number	BRS0704
Dimensions	162mm x 162mm



Braille Signage

Braille Signage Baby Change

Part Number	BRS0705
Dimensions	162mm x 162mm



Braille Signage Disabled

Part Number	BRS0702
Dimensions	162mm x 162mm



Braille Signage Unisex Disabled Left Hand Transfer

Part Number	BRS0706L
Dimensions	162mm x 162mm



Braille Signage Unisex Disabled Right Hand Transfer

Part Number	BRS0706R
Dimensions	162mm x 162mm



Braille Signage

Ordering Procedure

Sample part number BRS0700 is made up of two sections. Choose your product by selecting an option from each section.

Product Code	Design
BRS07	00

Product Code	
Braille Signage	BRS07

Design	
Male	00
Female	01
Disabled	02
Unisex	03
Shower	04
Baby Change	05
Unisex Disabled Left Hand Transfer	06
Unisex Disabled Right Hand Transfer	07

Cabin Hooks and Handrail Brackets

Cabin Hook

Length	Finish	Packaging	Part Number
75mm	Chrome Plate	Display Pack	L829-75MCPDP
100mm	Chrome Plate	Display Pack	L829-100MCPDP
150mm	Chrome Plate	Display Pack	L829-150MCPDP

Description

Cast brass hook and eye, available in three lengths. Individually display packed, complete with fixing screws.



Handrail Bracket

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L832CPDP
Polished Brass Plate	Display Pack	L832PBPD
Satin Chrome Pearl	Display Pack	L832SPDP

Description

Zinc alloy casting, visible three screw fixing to wall. Display packed, complete with fixing screws.



Coat Hooks

L45 Hat and Coat Hook

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L45CPDP
Satin Chrome Pearl	Display Pack	L45SPDP

Description

Zinc alloy castings, individually display packed, complete with fixing screws.



L432 Door Bumper and Hook

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L432CPDP
Satin Chrome Pearl	Display Pack	L432SPDP

Description

Zinc alloy castings with nylon cushion tip. Individually display packed, complete with fixing screws.



L1310 Combined Hat and Coat Hook

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L1310CPDP
Satin Chrome Pearl	Display Pack	L1310SPDP

Description

Zinc alloy castings, individually display packed, complete with fixing screws.



L1320 Combined Hat and Coat Hook

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L1320CPDP
Satin Chrome Pearl	Display Pack	L1320SPDP

Description

Zinc alloy castings, individually display packed, complete with fixing screws.



Coat Hooks

296 Hat and Coat Hook

Finish	Packaging	Part Number
Satin Stainless Steel	Trade Pack	296SSS

Description

Stainless steel, individually trade packed, complete with fixing screws.



297 Bumper and Hook

Finish	Packaging	Part Number
Satin Stainless Steel	Trade Pack	297SSS

Description

Stainless steel, individually trade packed, complete with fixing screws.



Robe Hooks

L94 Robe Hook

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L94CPDP
Satin Chrome Pearl	Display Pack	L94SPDP

Description

Zinc alloy castings, individually display packed, complete with fixing screws.



L825 Robe Hook

Finish	Packaging	Part Number
Chrome Plate	Display Pack	L825CPDP
Satin Chrome Pearl	Display Pack	L825SPDP

Description

Brass casting, individually display packed, complete with fixing screws.



100 Series Architectural Hinges

General Information

The 100 Series Architectural Hinges are designed to provide an effective solution to hanging doors where there is a need for high grade, architectural quality hinges. These hinges are suitable for use on aluminium or steel glazed doors and solid core timber doors. Many of them can also be used on fire doors.

Lockwood Warranty

Selection of the appropriate hinge for the application is critical to ensure the longevity of the hinge and customer satisfaction. The Lockwood warranty is only applicable for hinges that are installed in accordance with the recommendations of the hinge selection table on page 15.

Hinge Height and Width

When reading dimensions, the first figure always indicates the hinge height and the second indicates the width, eg. 100 mm x 75 mm. The door thickness and door jamb width (also trim size if applicable) determine the width of the hinge required. The width is measured across the leaves when the hinge is fully opened as shown in Diagram 1.

Security

Fixed pin hinges should be used on exterior doors or doors opening out. Also, doors made of particle should have a capped tongue edge strip framing the door, so that hinges can be screwed into solid material.

Hinge Maintenance

The maintenance free hinges in the Lockwood 100 Series Architectural Hinge range are the Severe Duty Butt Hinges with the phosphorous bronze bushes (Part numbers LW10000SDSSS and LW10075SDSSS). These Severe Duty Butt Hinges are self-lubricating.

The remainder of the Lockwood 100 Series Architectural Hinge range are greased hinges which are fit for purpose in many applications. The grease is fundamental to the durability of the product. However, with use it is possible for some grease to seep out onto the surface of the hinge and if left unchecked can lead to door, frame, wall or floor staining in extreme cases.

To prevent this from happening, greased hinges should be monitored and cleaned externally during their life.

In environments where hygiene is critical such as hospitals and food facilities or where hinge maintenance is not a priority, the Lockwood Severe Duty Butt Hinges are highly recommended.

Finishes

Satin Stainless Steel **SSS**
Polished Stainless Steel **PSS**
Satin Chrome **SC**

Number of Hinges Per Door

For doors up to 2,100mm high, at least 3 hinges should be used if the Adjusted Door Weight is over 20kg. If the Adjusted Door Weight is 20kg or less, 2 hinges can be used. For doors over 2,100mm high, at least 4 hinges should be used. The method for establishing the Adjusted Door Weight is given on Page 15.

Fire Rated

Please refer to the Hinge Selection Table on page 15 for hinge fire rating information.

Door Stops

It is recommended a door stop be installed to ensure that the door has a positive backstop at the degree of opening selected. It is essential to use a door stop where design factors of the building necessitate opening out of external doors and no windbreak is provided.

Hinge Selection

Prior to selecting a suitable hinge, the Adjusted Door Weight needs to be calculated. The Adjusted Door Weight takes into account the extra stresses that door closers and wider doors place on the hinges and is used to select the appropriate hinge from the table below. Please refer to Page 15 for calculation of the Adjusted Door Weight.

100 Series Architectural Hinges

Calculating the Adjusted Door Weight.

Establish the weight of door including all door furniture, metal plates and windows. If you have a door closer, add 20% to the door weight.

If the door closer has back-check, add 75% to the door weight, instead of the 20% above.

For door width over 950mm:

951mm to 1050mm, add 10% to door weight.

1051mm to 1150mm, add 20% to door weight.

1151mm to 1250mm, add 30% to door weight.

Therefore, Adjusted Door Weight = (total weight of the door) + (% for door closer/back-check) + (% for any width over 950mm) Please refer to lockweb.com.au/hingecalc for the Adjusted Door Weight online calculator.

Hinge Selection Table

This Hinge Selection Table has been developed to assist in hinge selection for doors in commercial applications where frequent use is anticipated (eg hospitals, schools, universities, offices and public buildings). In applications where it is reasonable to anticipate less frequent use (eg

apartment entry doors) the maximum adjusted door weight becomes less relevant and as such the complete range of Lockwood hinges can be relied on to provide trouble free service.

Hinge Part Number	Hinge Size (mm)	Description	*Finish	Type	*Material	Maximum Adjusted Door Weight (kg)	Fire Rating
LW10075RLSSS	100x75x2.5	Right Hand Lift Off	SSS	Lift Off Hinge	SS	50	None
LW10075LLSSS		Left Hand Lift Off					
LW10000BBPSS	100x100x2.5	Ball Bearing	PSS	Butt Hinge	SS	60	These Lockwood hinges have been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS 1905.1-2005, Part 1: Fire Resistant Doorsets.
LW10000BBS	100x100x2.5	Ball Bearing	SSS				
LW10075BBPSS	100x75x2.5	Ball Bearing	PSS				
LW10075BBS	100x75x2.5	Ball Bearing	SSS				
LW10000FPPSS	100x100x2.5	Fixed Pin	PSS				
LW10000FPSS	100x100x2.5	Fixed Pin	SSS				
LW10075FPPSS	100x75x2.5	Fixed Pin	PSS				
LW10075FPSS	100x75x2.5	Fixed Pin	SSS				
LW10000LPPSS	100x100x2.5	Loose Pin	PSS				
LW10000LPSS	100x100x2.5	Loose Pin	SSS				
LW10075LPPSS	100x75x2.5	Loose Pin	PSS				
LW10075LPSS	100x75x2.5	Loose Pin	SSS				
LW10000BBSC	100x100x2.5	Ball Bearing	SC				
LW10075BBSC	100x75x2.5	Ball Bearing					
LW10000FPSC	100x100x2.5	Fixed Pin					
LW10075FPSC	100x75x2.5	Fixed Pin					
LW10000LPSC	100x100x2.5	Loose Pin					
LW10075LPSC	100x75x2.5	Loose Pin					
LW10000BBHDSS	100x100x3.0	Heavy Duty	SSS	Heavy Duty Butt Hinge	SS	70	
LW10000SDSSS	100x100x3.0	Severe Duty	SSS	Severe Duty Butt Hinge	SS	120	These Lockwood hinges have been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS 1905.1-2005, Part 1: Fire Resistant Doorsets.
LW10075SDSSS	100x75x3.0						

*Legend: SS=Stainless Steel

MS=Mild Steel


SSS=Satin Stainless Steel finish

PSS=Polished Stainless Steel finish


SC=Satin Chrome finish

100 Series Architectural Hinges


Typical Applications

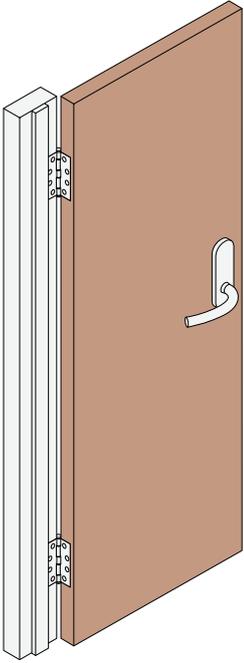

Typical internal doors

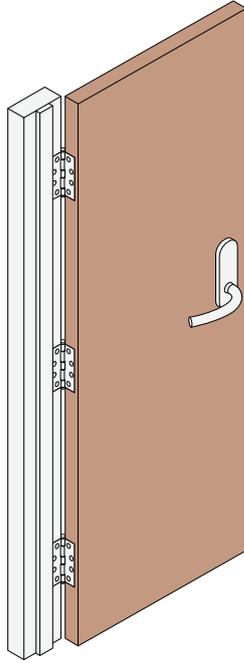

Typical external or high usage doors

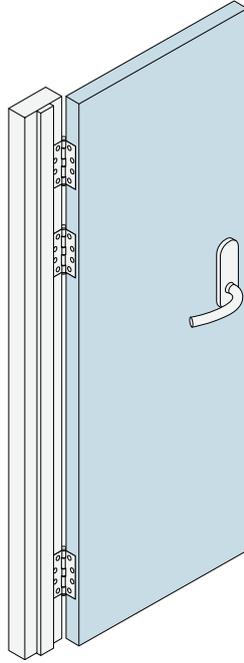

Typical heavy doors

Hinge Throw Selection


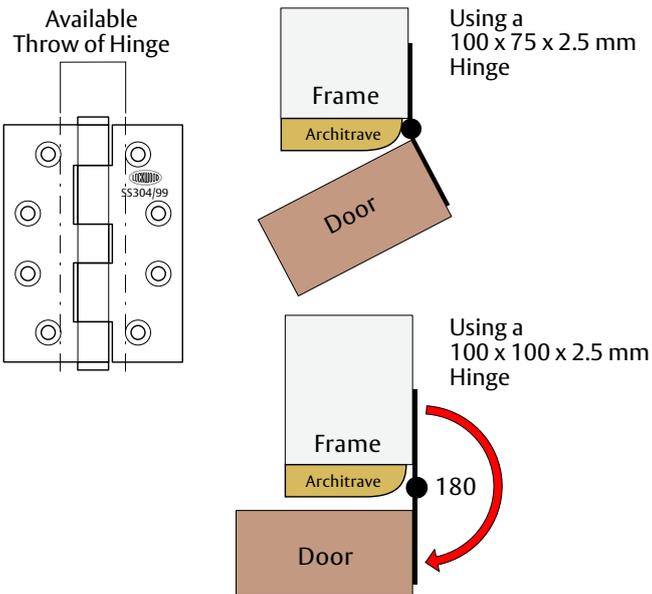


Diagram 1



100 Series Architectural Hinges

Stainless Steel Ball Bearing Hinges

Satin Stainless Steel/Polished Stainless Steel/Button Tipped Hinge

Suitable for interior/exterior doors where a durable, architectural ball bearing hinge is required, or when being used in conjunction with a door closer.

- Two ball bearings
- Manufactured from 304 stainless steel
- Available fixed pin only
- Metric sizes
- Standard metric hole pattern

Sizes: 100 x 75 x 2.5 mm, 100 x 100 x 2.5 mm and 100 x 100 x 3.0mm


Thickness: 2.5 mm and 3.0mm

Screws:


Stainless Steel Screws supplied with each hinge

10 Gauge x 30mm Wood Screws x 8
M5 12mm Metal Thread Screws x 4

Pack Size: 30 (and 18 for the 3.0mm thick hinge)



LW10075BBPSS



LW10075BBSSS



Stainless Steel Hinges

Satin Stainless Steel/Polished Stainless Steel/Button Tipped Hinge

Suitable for interior/exterior doors where a durable, architectural hinge is required.

- Manufactured from 304 stainless steel
- Available fixed and loose pin
- Metric sizes
- Standard metric hole pattern

Sizes: 100 x 75 x 2.5 mm and 100 x 100 x 2.5 mm


Thickness: 2.5 mm

Screws:


Stainless Steel Screws supplied with each hinge

10 Gauge x 30mm Wood Screws x 8
M5 x 12mm Metal Thread Screws x 4

Pack Size: 30



LW10075LPSSS



LW10000FPPSS



100 Series Architectural Hinges

Mild Steel Ball Bearing Hinges

Suitable for general purpose interior/ exterior doors where a standard ball bearing hinge is required or when being used in conjunction with a door closer.

- Manufactured from high grade steel
- Available fixed pin only
- Metric sizes
- Standard metric hole pattern

Sizes: 100 x 75 x 2.5 mm and 100 x 100 x 2.5 mm

Thickness: 2.5 mm



Screws:

Zinc Plated Mild Steel Screws supplied with each hinge

10 Gauge x 30mm Wood Screws x 8
M5 x 12mm Metal Thread Screws x 4

Pack Size: 30

Finish: Satin Chrome



LW10000BBSC



Mild Steel Hinges

Suitable for general purpose interior/ exterior doors where a standard hinge is required.

- Manufactured from high grade steel
- Available fixed and loose pin
- Metric sizes
- Standard metric hole pattern

Sizes: 100 x 75 x 2.5 mm and 100 x 100 x 2.5 mm

Thickness: 2.5 mm



Screws:

Zinc Plated Mild Steel Screws supplied with each hinge

10 Gauge x 30mm Wood Screws x 8
M5 x 12mm Metal Thread Screws x 4

Pack Size: 30

Finish: Satin Chrome



LW10000LPSC



100 Series Architectural Hinges

Stainless Steel Bushed Bearing Hinges (Severe Duty)

High performance bushed bearing butt hinges suitable for severe duty applications.

- Manufactured from 304 stainless steel
- Available in fixed pin only
- Metric sizes

Sizes:

100 x 100 x 3.0mm and 100 x 75 x 3.0mm


Screws:

Stainless Steel Screws supplied with each hinge.


10 Gauge x 30mm Wood Screws x 8
M5 x 14mm Metal Thread Screws x 4

Pack Size: 36

Finish: Satin Stainless Steel



LW10075SDSSS



Lift Off Stainless Steel Hinges

Suitable for where a door may need to be lifted off after installation

- Available in left and right hand versions
- Manufactured from 304 stainless steel
- Metric sizes

Sizes: 100 x 75 x 2.5mm


Screws:

Stainless Steel Screws supplied with each hinge.

10 Gauge x 30mm Wood Screws x 8
M5 x 12mm Metal Thread Screws x 4

Pack Size: 30

Finish: Satin Stainless Steel



LW10075LLSSS



100 Series Architectural Hinges

Fast Fix Stainless Steel Ball Bearing Hinge

Ideal for general purpose interior/ exterior use where aluminium frames/ doors are used.

- Two ball bearings
- Manufactured from 304 stainless steel
- Available fixed pin only
- Metric sizes

Sizes: 100 x 70 x 2.5 mm

Thickness: 2.5 mm


Screws:

Stainless Steel Screws supplied with each hinge

10 Gauge x 30mm Wood Screws x 6

M5 x 12mm Metal Thread Screws x 6

Pack Size: 30

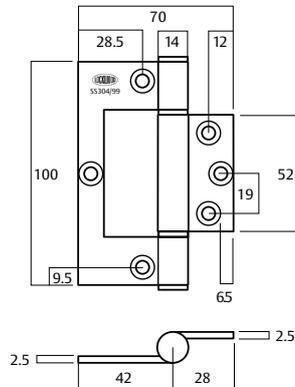

LW10070BBFFSS



Fast Fix Stainless Steel Ball Bearing Hinge

Ideal for general purpose interior/ exterior use where timber frames/ doors are used.

- Two ball bearings
- Manufactured from 304 stainless steel
- Available fixed pin only
- Metric sizes

Sizes: 100 x 70 x 2.5 mm

Thickness: 2.5 mm


Screws:

Stainless Steel Screws supplied with each hinge

10 Gauge x 32mm Wood Screws x 7

M5 x 12mm Metal Thread Screws x 7

Pack Size: 30

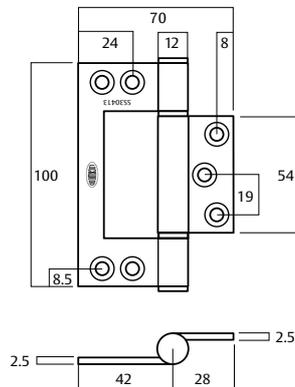

LW10070BBFFSSA



Door Chain and Locks

140 Door Chain Lock - Key Operated

Finish	Packaging	Part Number
Chrome Plate	Display Pack	140CPDP
Polished Brass	Display Pack	140PBDP

Description

Provides the security of a door chain plus the convenience of entry from outside by key.

Features and Specifications

Housing and Slide

Diecast zinc

Chain

Hardened steel

Mechanism

5 disc tumbler

Keying

Individually keyed



150 Door - Chain and Bolt

Finish	Packaging	Part Number
Chrome Plate	Display Pack	150CPDP
Polished Brass	Display Pack	150PBDP

Description

A strong, secure combination of door chain and bolt.

Features and Specifications

Housing and Slide

Diecast zinc

Chain

Hardened steel

Bolt


Hardened steel



Door Stops

A280 Round Door Stop

Finish	Packaging	Part Number
Satin Stainless	Trade	A280SS
Polished Stainless	Trade	A280PS

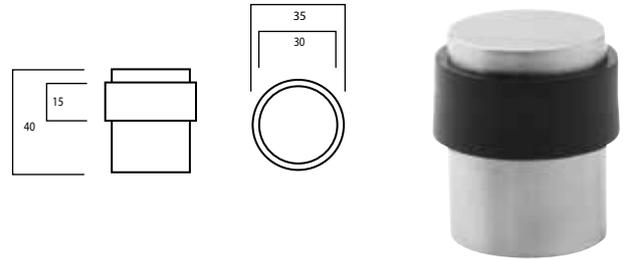

Description

This general purpose door stop is floor mounted and prevents doors and handles damaging walls and fixtures. The black rubber buffer provides further protection for door finishes.

Features and Specifications


Dimensions

35 mm diameter.

Mounting screw included (1 of 30mm x 10G)

A290 Half Moon Door Stop

Finish	Packaging	Part Number
Satin Chrome Brushed	Trade	A290SC
Satin Stainless	Trade	A290SS

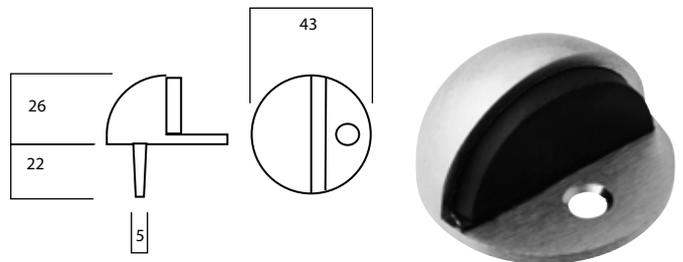

Description

Designed to be floor mounted, the door stop prevents doors and handles damaging walls and fixtures. The black rubber buffer gives further protection for door finishes.

Features and Specifications

Dimensions

43 mm diameter.

Mounting screw included (1 of 38mm x 12G)

Door Stops

A292 Half Moon Door Stop Packer

Finish	Packaging	Part Number
Satin Chrome Brushed	Trade	A292SC


Description

10mm packer to suit A290 half moon door stop.

Features and Specifications

Dimensions

43 mm diameter.
10mm thick packer

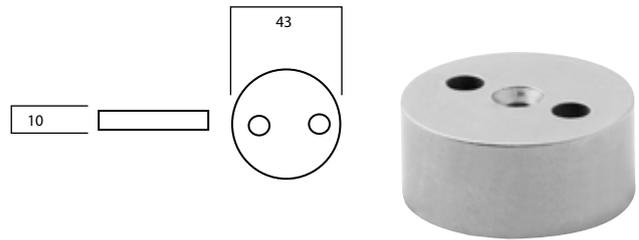

A300 Door Stop

Finish	Packaging	Part Number
Satin Stainless Steel	Trade	A300SS
Polished Stainless Steel	Trade	A300PS

Description

Designed to be wall mounted, the door stop prevents doors and handles damaging walls and fixtures. Model 300 features concealed fixing (behind the rubber buffer).

Features and Specifications

Dimensions

75 mm projection, 19 mm diameter.
Mounting Screw included (1 of 30mm x 10G)



Door Stops

A310 Magnetic Door Stop

Finish	Packaging	Part Number
Satin Chrome Brushed	Trade	A310SC

Description


Designed to be wall or floor mounted, this door stop incorporates a magnetic catch to hold the door in the open position.

Features and Specifications

Dimensions

Magnetic hold open

Mounting Screw included (6 of 20mm x 6G)

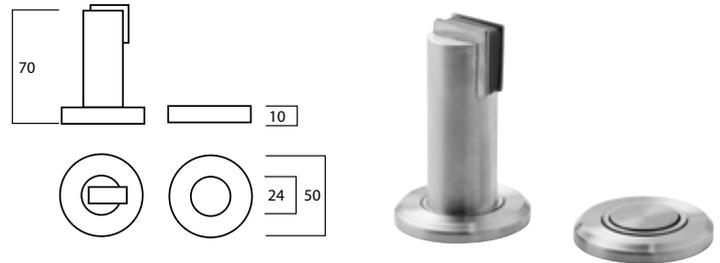

A320 Door Stop

Finish	Packaging	Part Number
Satin Chrome	Trade	A320SC
Polished Chrome	Trade	A320CP

Description

Designed to be wall mounted, the door stop prevents doors and handles damaging walls and fixtures. The black rubber buffer gives further protection for door finishes.

Features and Specifications


Dimensions

38mm diameter base.

75mm projection.

Mounting screws included.


Zinc alloy

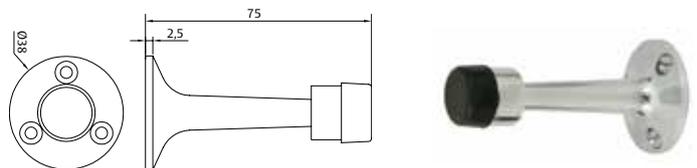

Door Stops

A330 Door Stop

Finish	Packaging	Part Number
Satin Stainless Steel	Trade	A330SS
Polished Stainless Steel	Trade	A330PS

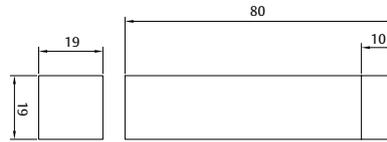

Description

Designed to be wall mounted, the door stop prevents doors and handles damaging walls and fixtures. The black rubber buffer gives further protection for door finishes.

Features and Specifications

Dimensions

80mm projection.


19mm width.

Mounting screw included.

Stainless steel

A350 Door Stop

Finish	Packaging	Part Number
Chrome Plate	Trade	A350CP
Satin Chrome	Trade	A350SC
Polished Brass	Trade	A350PB



Description

Designed to be wall mounted, the door stop prevents doors and handles damaging walls and fixtures. Model 350 features concealed fixing (behind the rubber buffer).

Features and Specifications

Dimensions

75 mm projection, 35 mm diameter.

Door Stops

857 Door Stop

Finish	Packaging	Part Number
Satin Chrome Pearl	Trade	857SP

Description


A coil spring and ball ensure the arm indexes at "out of way" position. Designed for use as a bottom rail door stop.

Features and Specifications

Materials

Body and arm – cast brass

Buffer – rubber



Kickplates



Description

Lockwood Kickplates are available in two different installation choices and made to order sizes. They feature square corners and are 1.2mm thick with a width range of 420mm – 1220mm and height range of 100 mm – 1200mm. Undrilled kickplates that require adhesive fixing or drilled and countersunk kickplates provided with fasteners are also offered.

Application

Drilled and countersunk kickplates are typically suited for use on wooden doors with wood screws being supplied as standard. Adhesive fixed kickplates are suitable for application on any type of door.

Product Details

Dimensions	Thickness	1.2mm
	Height range	100mm – 1200mm
	Width range	420mm – 1220mm
Door Thickness	Any	
Standard Finish	Satin Stainless Steel (SS)	
Materials	404 Stainless Steel	

Standards and Compliance



Lockwood Kickplates have successfully been fire tested up to 4 hours (depending on type of fire door) on fire door assemblies in accordance with Australian Standard AS 1905.1: 1997 Part 1: Fire Resistant Doorsets.




This product has been successfully tested in accordance with AS 2331-3.1: 2001. Neutral Salt Spray Test (NSS TEST).

Kickplate – Concealed Fixing



Kickplate – Visible Fixing

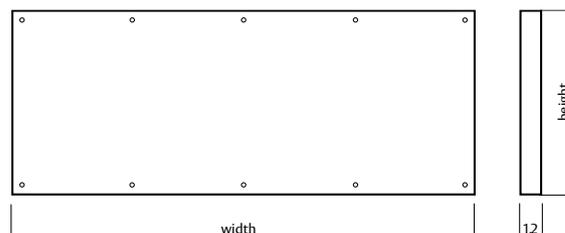

Kickplates

Ordering Procedure

Sample part number KP0820X0200CSSS is made up of several sections. Choose your product by selecting an option from each section.

Product	Width	Height	Fixing Option	Finish
KP	0820	0200	CS	SS

Product	Height	Finish
Kick Plate KP	0100 – 1200mm 0200	Stainless Steel SS

Width	Fixing Option
0420 – 1220mm 0820	Countersunk CS Undrilled UD

Indicate door number (if applicable), height and width of kickplates ensuring that they are within the parameters specified. Also indicate whether drilled and countersunk or undrilled kickplates are required. Pricing is determined from the closest nominal size. Kickplates are delivered labelled with sizes and door numbers (if specified).

Kickplate Nominal Sizes

	H-01	H-02	H-03	H-04	H-05	H-06	H-07	H-08	H-09	H-10	H-11	H-12	H-13	H-14	H-15	H-16	H-17	H-18	H-19	H-20	H-21	H-22	H-23
	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-01 420	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-02 470	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-03 520	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-04 570	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-05 620	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-06 670	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-07 720	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-08 770	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-09 820	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-10 870	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-11 920	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-12 970	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-13 1020	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-14 1070	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-15 1120	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-16 1170	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
W-17 1220	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200

Door Viewer and Tubular Latch

Security Door Viewer - Glass Lens

Finish	Packaging	Part Number	Body	Door Thickness
Chrome	Display	160CPDP	Brass	32 to 51mm
Polished Brass	Display	160PBDP	Brass	32 to 51mm



Fire Rated

The 160 Security Door Viewer has a glass lens and has been tested up to 4 hours on fire door assemblies in accordance with Australian Standard AS 1905.1: Fire Resistant Doorsets.

Optical glass lens gives a clear 160° angle view.

7580 Roller Bolt



Description

Designed for both internal and external doors, the Lockwood Roller Bolt is suited to a wide range of applications and perfectly complements the Paradigm deadbolt range and Lockwood Entrance handles.

The roller bolt functions to “snap” in and out of the strike which will keep the door closed when it isn’t locked. This means a lever / knob is not required to open the door.




Product Details

Feature	Adjustable bolt projection with locknut to prevent loosening.
Handing	Non-handed
Materials	Satin Chrome face plate and T strike
Suitable	Internal and external doors
Supplied	Fixing screws Both 30mm and 90mm strikes supplied as standard

7580 Roller Bolt

7580 Roller Bolt

Part Number 7580SC

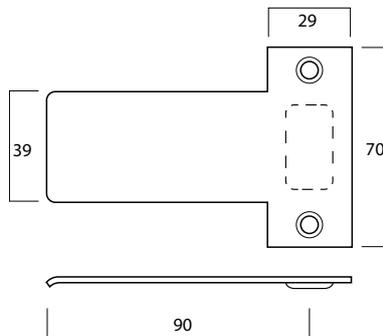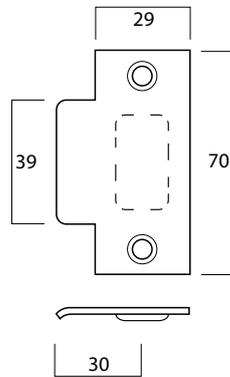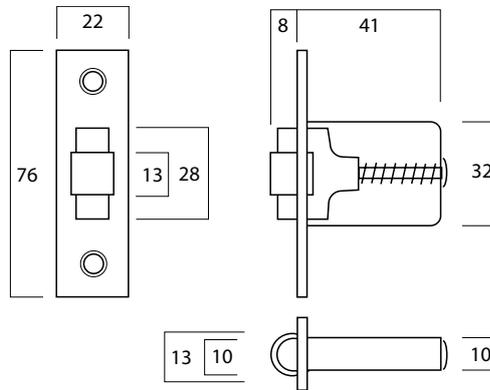

6260 Privacy Bolt



Description

Suitable for through fixing of disabled turns and emergency indicating turns

Product Details

Feature	Tubular privacy bolt 60 mm backset Strike Spindle Fixing screws
Handing	Non-handed
Materials	Polished Brass PB Polished Stainless Steel PSS Satin Stainless Steel SSS
Supplied	Fixing screws Strike Latch

6260 Privacy Bolt

6260 Privacy Bolt

Finish	Packaging	Part Number
Polished Brass	Trade	6260PB
Polished Stainless Steel	Trade	6260PSS
Satin Stainless Steel	Trade	6260SSS



5260 Tubular Latch



Description

Tubular latch designed for use with horizontal through fixing door furniture.

Product Details

Feature 2 Hour Fire Rating
60mm Backset

Handing Non-handed

Materials Polished Brass **PB**
Chrome Plate **CP**
Satin Chrome **SC**
Satin Pearl **SP**

Supplied Fixing screws
Strike
Latch

5260 Tubular Latch

5260 Tubular Latch

Description	Part Number	Commercial / Residential	Function	Spindle Supplied
60MM PASSAGE LATCH SQUARE END FACE PLATE & T STRIKE-CHROME PLATE	5260/1SFTCP	Commercial	Passage	Yes
60MM PASSAGE LATCH SQUARE END FACE PLATE & T STRIKE-POLISHED BRASS	5260/1SFTPB	Commercial	Passage	Yes
60MM PASSAGE LATCH SQUARE END FACE PLATE & T STRIKE-BRUSHED SC	5260/1SFTSC	Commercial	Passage	Yes
60MM PASSAGE LATCH SQUARE END FACE PLATE & T STRIKE-SATIN CHROME PEARL	5260/1SFTSP	Commercial	Passage	Yes
60MM PASSAGE LATCH DRIVE IN WITH ROUND STRIKE	5260/1DIRCP	Residential	Passage	No
60MM PASSAGE LATCH SQUARE END FACE PLATE AND D STRIKE	5260/1SFDSP	Residential	Passage	No
60MM PASSAGE LATCH SQUARE END FACE PLATE AND D STRIKE	5260/1SFDSC	Residential	Passage	No
60MM PASSAGE LATCH SQUARE END FACE PLATE AND D STRIKE	5260/1SFDSP	Residential	Passage	No
60MM PRIVACY LATCH DRIVE IN WITH ROUND STRIKE	5260/2DIRCP	Residential	Privacy	No
60MM PRIVACY LATCH SQUARE END FACE PLATE AND D STRIKE	5260/2SFDSP	Residential	Privacy	No
60MM PRIVACY LATCH SQUARE END FACE PLATE AND D STRIKE	5260/2SFDSC	Residential	Privacy	No
60MM PRIVACY LATCH SQUARE END FACE PLATE AND D STRIKE	5260/2SFDSP	Residential	Privacy	No

5260 Tubular Latch Accessories

Description	Part Number	Commercial / Residential	Function	Spindle Supplied
5200 D STRIKE CHROME PLATE	5200/STRIKEDCP	Residential	Strike	No
5200 D STRIKE SATIN CHROME	5200/STRIKEDSC	Residential	Strike	No
5200 D STRIKE SATIN PEARL	5200/STRIKEDSP	Residential	Strike	No
5200 ROUND STRIKE CHROME PLATE	5200/STRIKERCSP	Residential	Strike	No
5200 T STRIKE CHROME PLATE	5200/STRIKETCP	Commercial	Strike	No
5200 T STRIKE POLISHED BRASS	5200/STRIKETPB	Commercial	Strike	No
5200 T STRIKE BRUSHED SATIN CHROME PLATE	5200/STRIKETSC	Commercial	Strike	No
5200 T STRIKE SATIN PEARL	5200/STRIKETSP	Commercial	Strike	No

Fire Rated

Lockwood 5260 Series latches has been successfully tested up to two hours (depending on type of doorset) on fire door assemblies in accordance with Australian standard As 1905.1-2005, Part 1: Fire Resistant Doorsets

Lockwood Auto Shoot Bolt



Application

The Lockwood Auto Shoot Bolt can be used at the top and bottom of the inactive leaf of timber double doors. Refer to installation diagrams on the next page.

Design

The Lockwood Auto Shoot Bolt is designed to allow the automatic release of the inactive leaf of a double leaf doorset without the need for turnsnibs or chains.

Product Details

Features

Steel construction for strength
Easily installed
Low maintenance

Standards and Compliance



The Lockwood Auto Shoot Bolt has been fire tested on E Core fire doors for up to 4 hours to Australian Standard AS 1530.4.




Anti-Corrosion.

Lockwood Auto Shoot Bolt

Lockwood Auto Shoot Bolt

Part Number 107501-040

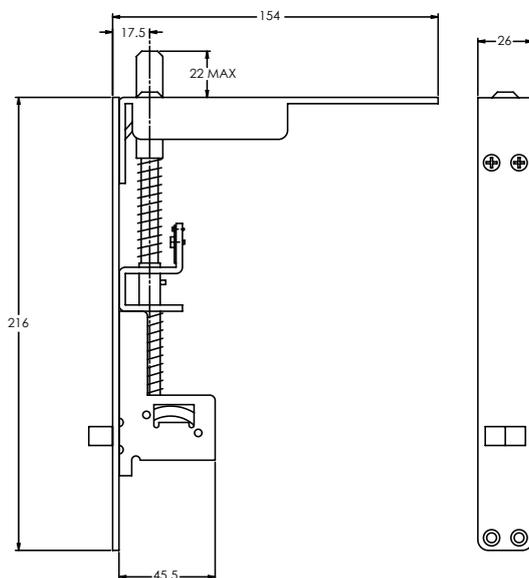

Flush Pulls



Features and Specifications

- Zinc alloy cast flush pulls
- Available in a range of three sizes and three finishes
- Display packed, complete with fixing screws


Product Details

Dimensions	Small: 85mm x 30mm Medium: 115 x 35mm Large: 145 x 40mm
Materials	Zinc alloy cast
Finish	Chrome Plate (CP) Polished Brass Plate (PBP) Satin Chrome Pearl (SP)

Flush Pulls


L609

Dimensions	Finish	Packaging	Part Number
85 x 30mm	Chrome Plate	Display Pack	L609CPDP
	Polished Brass Plate	Display Pack	L609PBPD
	Satin Chrome Pearl	Display Pack	L609SPDP

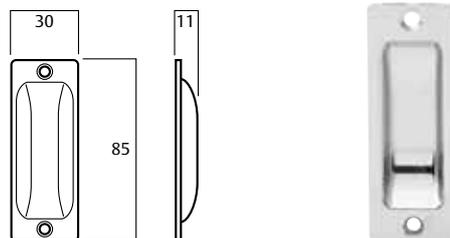


L611

Dimensions	Finish	Packaging	Part Number
115 x 35mm	Chrome Plate	Display Pack	L611CPDP
	Polished Brass Plate	Display Pack	L611PBPD
	Satin Chrome Pearl	Display Pack	L611SPDP

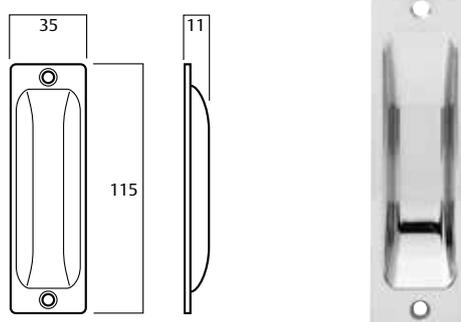

L610

Dimensions	Finish	Packaging	Part Number
145 x 40mm	Chrome Plate	Display Pack	L610CPDP
	Polished Brass Plate	Display Pack	L610PBPD
	Satin Chrome Pearl	Display Pack	L610SPDP

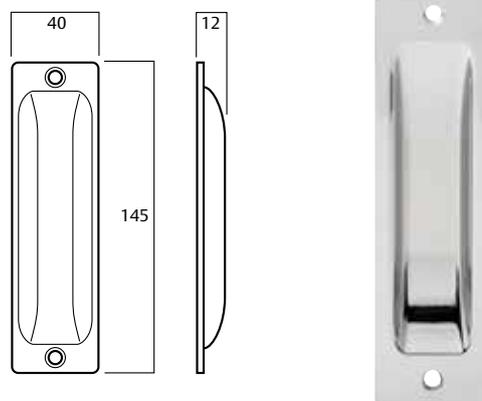

Flush Pulls



Features and Specifications

- Stainless steel flush pulls
- Available in two designs
- Each design available in two sizes and two finishes
- Trade packed, complete with fixing screws

Product Details


Dimensions	120mm by 50mm 150mm by 50mm
Materials	Stainless Steel
Finish	Polished Stainless Steel (PS) Satin Stainless Steel (SS)

Flush Pulls

FP1-120

Dimensions	Finish	Packaging	Part Number
120 x 50mm	Satin Stainless Steel	Trade Pack	FP1-120SS
	Polished Stainless Steel	Trade Pack	FP1-120PS


Note: Fixing screws included.



FP1-150

Dimensions	Finish	Packaging	Part Number
150 x 50mm	Satin Stainless Steel	Trade Pack	FP1-150SS
	Polished Stainless Steel	Trade Pack	FP1-150PS


Note: Fixing screws included.



FP2-120

Dimensions	Finish	Packaging	Part Number
120 x 50mm	Satin Stainless Steel	Trade Pack	FP2-120SS
	Polished Stainless Steel	Trade Pack	FP2-120PS


Note: Fixing screws included.




FP2-150

Dimensions	Finish	Packaging	Part Number
150 x 50mm	Satin Stainless Steel	Trade Pack	FP2-150SS
	Polished Stainless Steel	Trade Pack	FP2-150PS

Note: Fixing screws included.

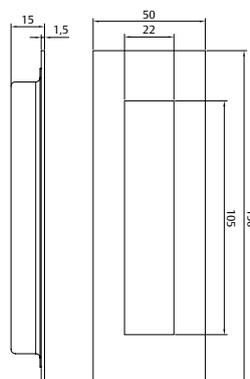

CH1 Stainless Steel Cupboard Handle with 224mm Centres

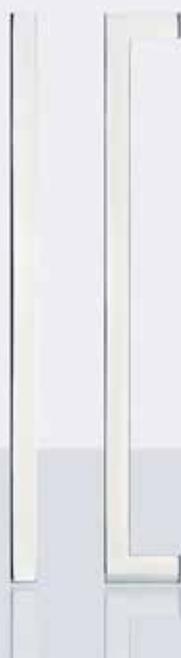

Features and Specifications

- Stainless steel cupboard handles
- Available in two finishes
- Trade packed, complete with fixing screws


Product Details

Dimensions	12x12x224(C-C)x35(H)mm
Materials	Stainless Steel
Finish	Satin Stainless Steel (SS) Polished Stainless Steel (SP)

CH1-224

Dimensions	Finish	Packaging	Part Number
12x12x224(C-C) x35(H)mm	Satin Stainless Steel	Trade Pack	CH1-224SS
	Polished Stainless Steel	Trade Pack	CH1-224PS

Note: Fixing screws included.

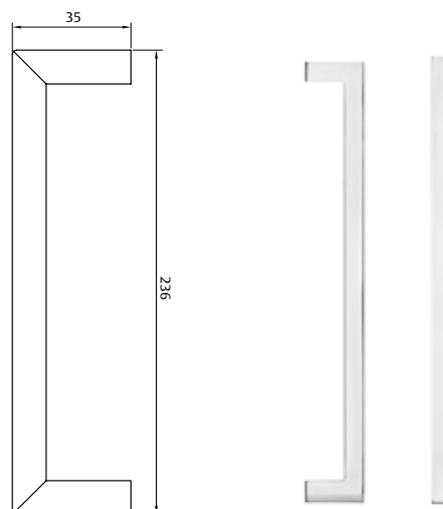

CH2 Stainless Steel Cupboard Handle with 224mm Centres



Features and Specifications

- Stainless steel cupboard handles
- Available in two finishes
- Trade packed, complete with fixing screws


Product Details

Dimensions	Dia12x224(C-C)X288(L)X34(H)mm
Materials	Stainless Steel
Finish	Satin Stainless Steel (SS) Polished Stainless Steel (SP)

CH2-224

Dimensions	Finish	Packaging	Part Number
Dia12x224(C-C) X288(L)X34(H) mm	Satin Stainless Steel	Trade Pack	CH2-224SS
	Polished Stainless Steel	Trade Pack	CH2-224PS

Note: Fixing screws included.

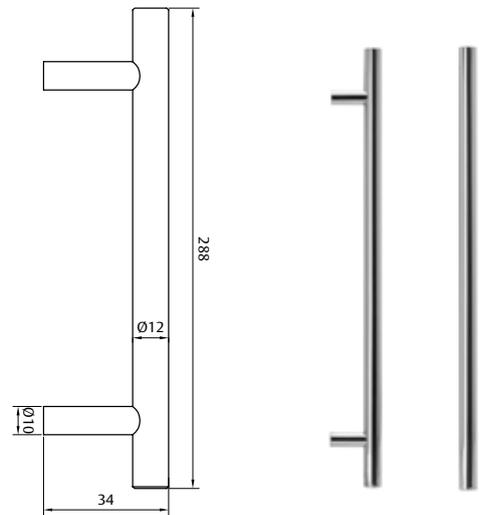

CH3 Stainless Steel Cupboard Handle With 224mm Centres



Features and Specifications

- Stainless steel cupboard handles
- Available in two finishes
- Trade packed, complete with fixing screws


Product Details

Dimensions	Dia10x224(C-C)x35(H)mm
Materials	Stainless Steel
Finish	Satin Stainless Steel (SS) Polished Stainless Steel (SP)

CH3-224

Dimensions	Finish	Packaging	Part Number
Dia10x224(C-C) x35(H)mm	Satin Stainless Steel	Trade Pack	CH3-224SS
	Polished Stainless Steel	Trade Pack	CH3-224PS

Note: Fixing screws included.



CK1 Stainless Steel Cupboard Knob



Features and Specifications

- Stainless steel cupboard knob
- Available in two finishes
- Trade packed, complete with fixing screw


Product Details

Dimensions	Dia25x30mm
Materials	Stainless Steel
Finish	Satin Stainless Steel (SS) Polished Stainless Steel (SP)

CK1-25

Dimensions	Finish	Packaging	Part Number
Dia25x30mm	Satin Stainless Steel	Trade Pack	CK1-25SS
	Polished Stainless Steel	Trade Pack	CK1-25PS

Note: Fixing screws included.





ASSA ABLOY

Lockwood is the leading brand in the Australian locking industry. With an established reputation for high quality products, this iconic brand provides a wide range of locking solutions to residential housing, commercial building and industrial application markets. Lockwood is supported by an extensive distribution and after-sales support network. Our customers include retailers, architects, trade and industrial personnel, locksmiths and security dealers.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.

**25YEAR
MECHANICAL
WARRANTY**

The Lockwood 25 Year Mechanical Warranty

Our belief that we manufacture the finest premium products available in today's market place is backed by the Lockwood 25 Year Mechanical Warranty, ensuring that Lockwood continues to keep Australians safe by delivering security and peace of mind.

For warranty terms and conditions, please visit www.lockweb.com.au or call **1300WARRANTY**

ASSA ABLOY Australia Pty Ltd
235 Huntingdale Road
Oakleigh, Victoria, 3166
Australia

1300 LOCK UP (1300 562 587)
lockweb.com.au

ASSA ABLOY New Zealand Ltd
6 Armstrong Road
Albany, Auckland, 0632
New Zealand

info.nz@assaabloy.com
Telephone +64 9415 7111
assaabloy.co.nz

