



ED22M - Exit Device

The Kaba ED22M has been designed to operate in conjunction with the renowned Kaba MS2 mortice lock.

The ED22M offers all the security functions of the MS2 mortice lock whilst providing a fast and convenient means of escape in the case of an emergency. The exit device is supplied with convenient mounting plates, providing fast, secure and easy thru fixing to timber doors.

PRODUCT CODE	FINISH	DESCRIPTION
ED22MSSS	SSS	ED22M - Exit Only Mortice Lock - 1060mm SSS
ED22MFSSS	SSS	ED22M - Exit Only Mortice Lock, Fire rated - 1060mm SSS

ED22M Exit Device

Mortice Lock Panic Exit Device

The ED22M is supplied complete with ED22 exit device and MS2ED (modified for double doors) mortice lock.

Length

Supplied in 1060mm standard length. Can be field sized to 645mm minimum length.

Mounting

- > Timber - Mounting plates and thru fixing screws (supplied).
- > Metal/Aluminium - Fixing direct to metal surface less mount plates (fixings not included). Drill and tap recommended.

Stile

115mm to suit metal/aluminium where mounting plates are not used. A mid rail is required if mounting plates are fitted or if the door opening is greater than 1050mm.

Door Thickness

35mm up to 50mm thick door as standard. Thicker doors on application.

Fixings

Supplied as standard with fixings for surface & thru fixing (surface fixings supplied as self-tapping timber screws).

Dogging

Hex (Allen) key type supplied as standard. Cylinder dogging by external hold back cylinder.

Note: Fire doors cannot include dogging due to fire regulations.

Handing

Reversible

Finish


Satin Stainless Steel (SSS)

Fire Rating

A fire rated version of the ED22M (ED22MF) is available.

This version comes without the dogging function.


The ED22MF has been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire door sets.



When specifying/ordering add suffix "F" to code, eg. ED22MFSSS.

Note: Fire doors cannot include dogging due to fire regulations.

OPTIONAL EXTERNAL TRIMS

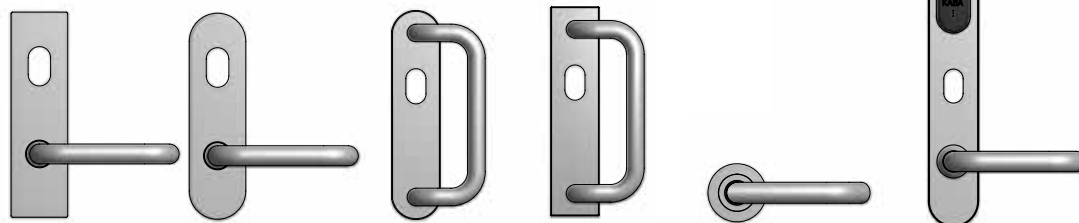

FUNCTION	600 SERIES	100 SERIES	WAFE	TAFE	LEVER HANDLES	CLEVER
NIGHTLATCH	604	104	-	-	FA270/FA280	
STOREROOM	601F	101F	WAFE03	TAFE03	240F/270F/ 280F/740F + FA270/FA280	Refer to c-lever options for all functions
CLASSROOM	601	101	-	-	240/270/ 280/740 +FA270/FA280	